


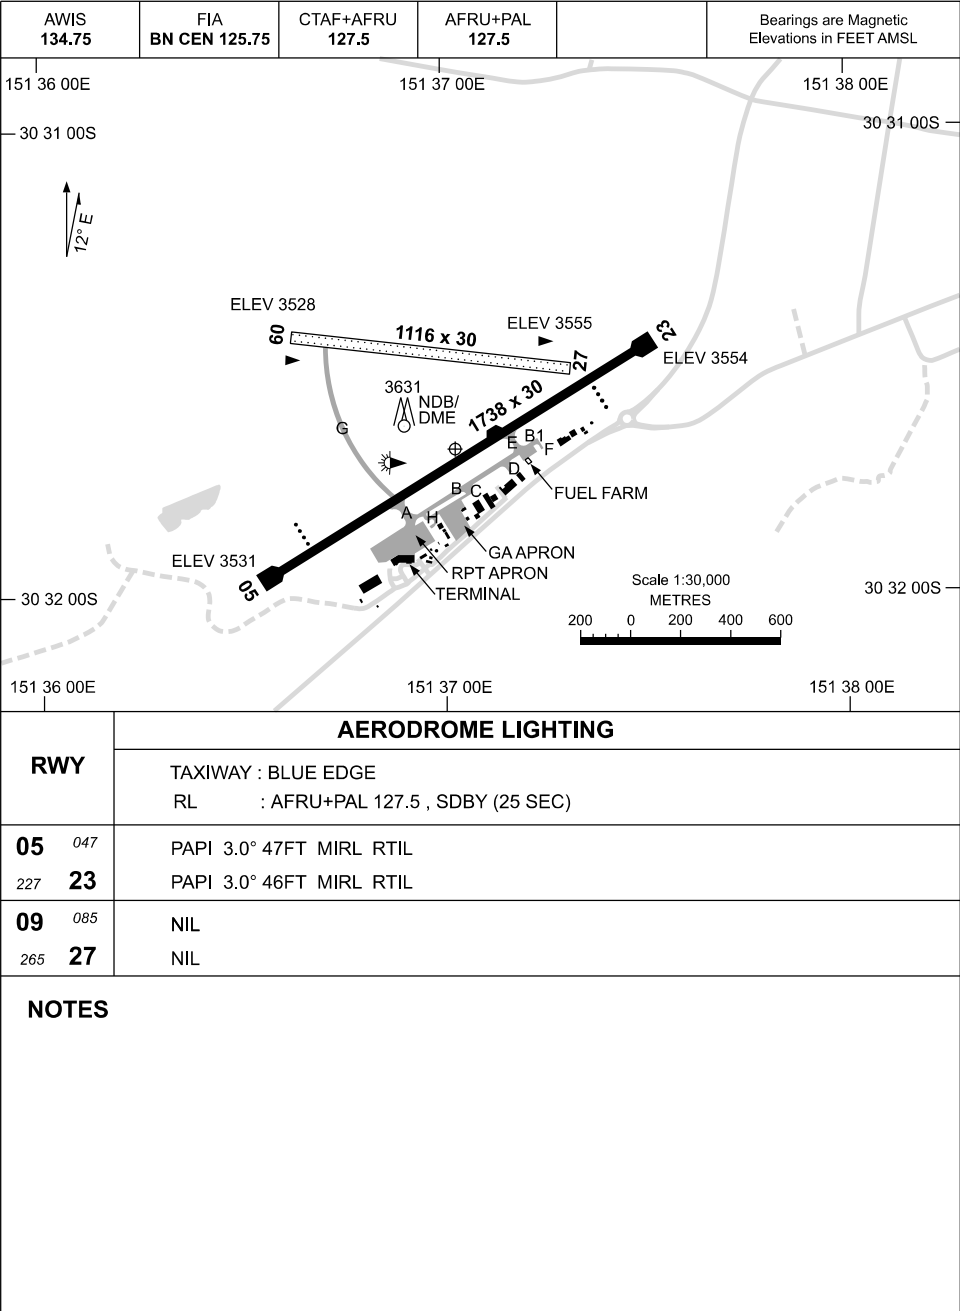


Changes: BUILDINGS, LABELLING, SDBY SWITCHOVER TIME, TWY H ADDED.

ARMAD01-185

DME or GNSS ARRIVAL PROCEDURES
ARMIDALE, NSW (YARM)

04 SEP 2025


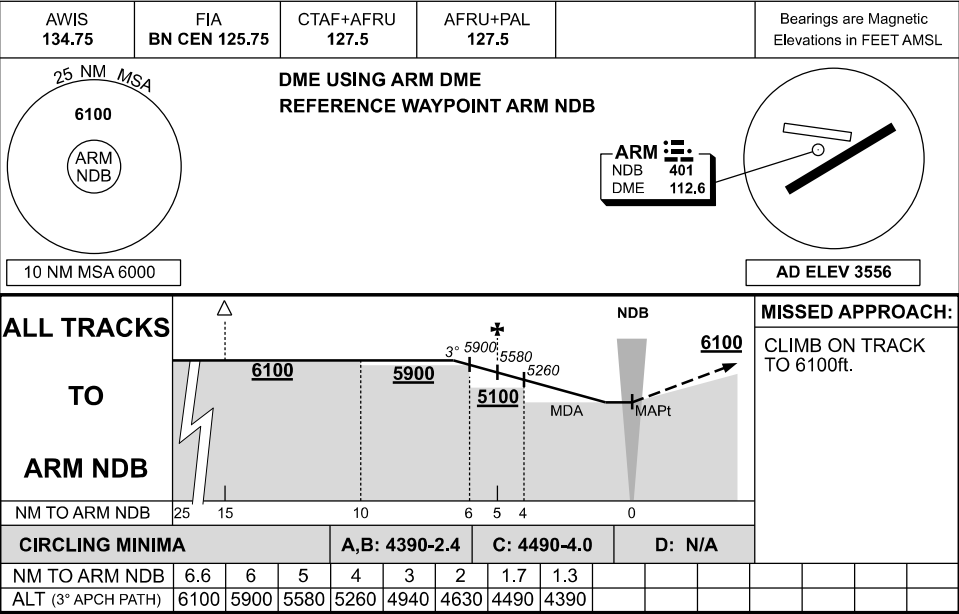


USE QNH

RNP RWY 23

04 SEP 2025

ARMIDALE, NSW (YARM)

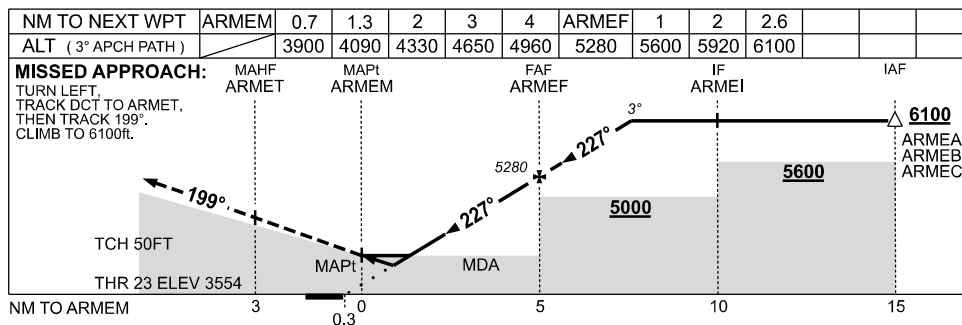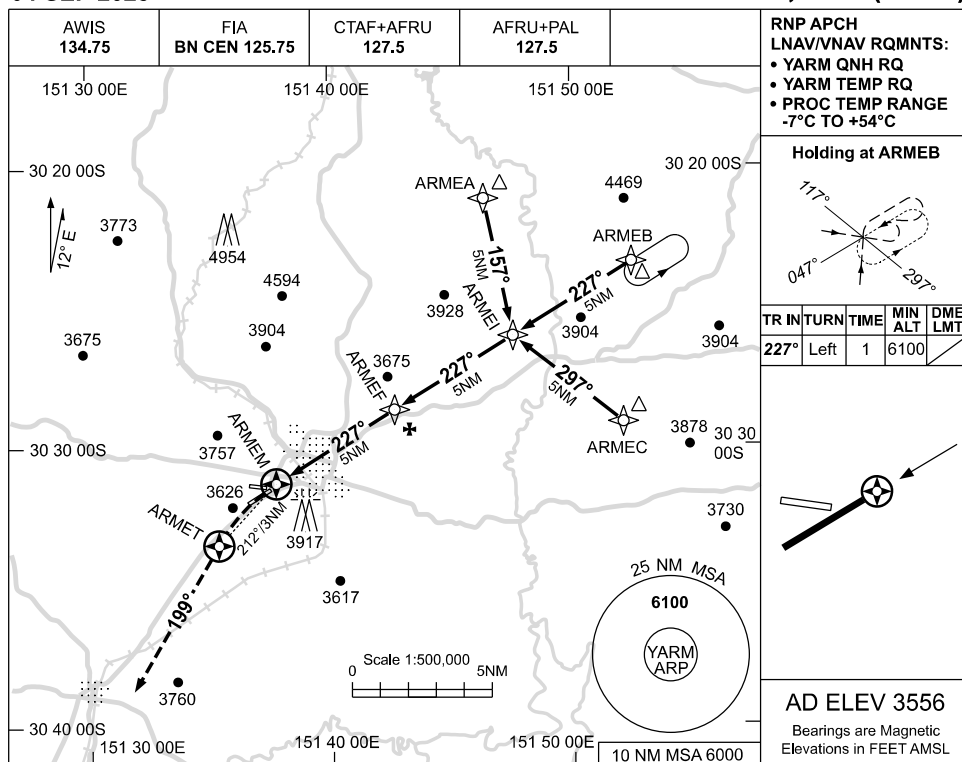

NOTES

CATEGORY	A	B	C	D
LNAV/VNAV	3900 (346-1.9)			NOT APPLICABLE
LNAV	4090 (534-3.0)			
CIRCLING	4390 (834-2.4)		4490 (934-4.0)	
ALTERNATE	(1334-4.4)		(1434-6.0)	

1. MAX IAS:
INITIAL : 210KT.

Changes: CIRCLING MINIMA, ALTERNATE MINIMA, Editorial.



ARMGN01-184

USE QNH

RNP RWY 05

04 SEP 2025

ARMIDALE, NSW (YARM)

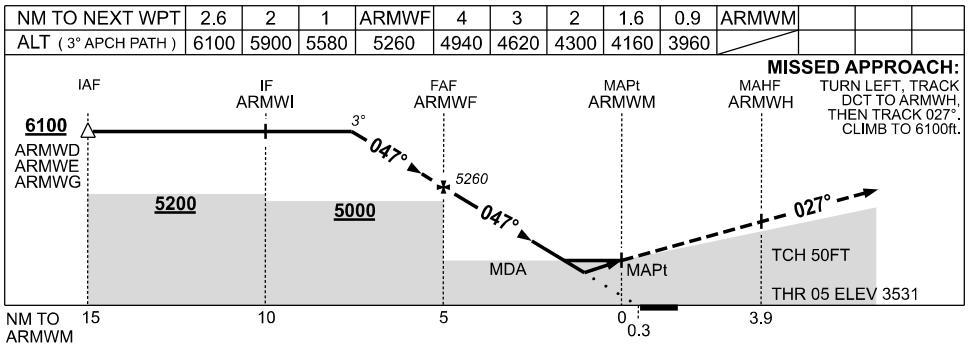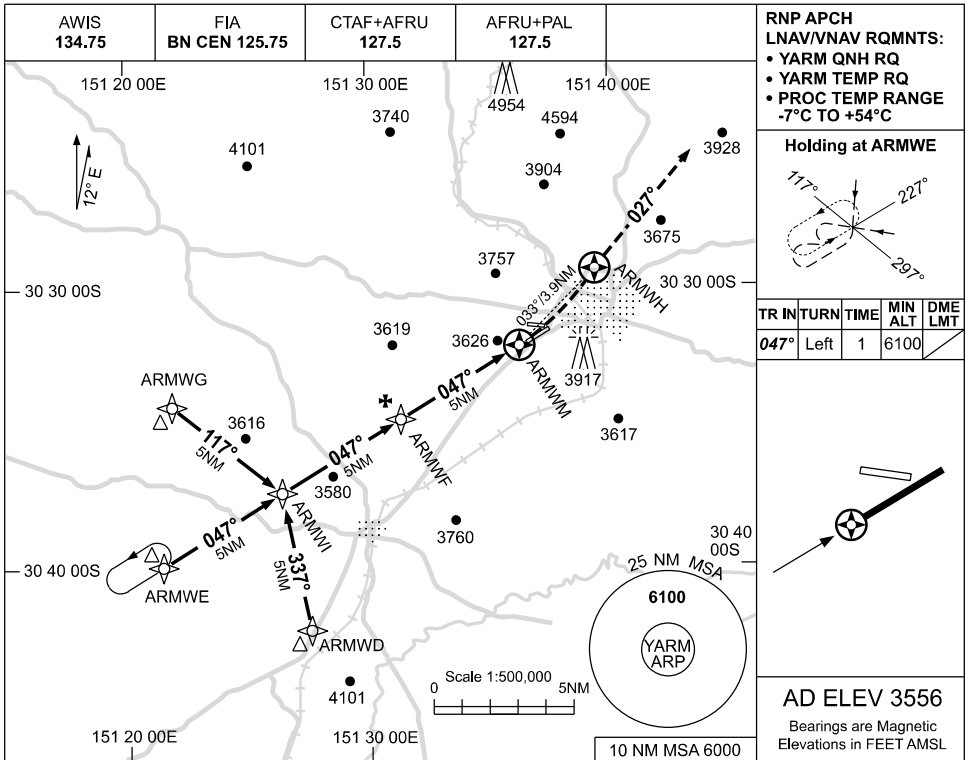

NOTES

 1. MAX IAS:
 INITIAL : 210KT.

CATEGORY	A	B	C	D
LNAV/VNAV	3960 (429-2.4)			NOT APPLICABLE
LNAV	4160 (629-3.6)			
CIRCLING	4390 (834-2.4)		4490 (934-4.0)	
ALTERNATE	(1334-4.4)		(1434-6.0)	

Changes: CIRCLING MINIMA, ALTERNATE MINIMA.

ARMGN02-184

NDB RWY 05
ARMIDALE, NSW (YARM)

AWIS
134.75

FIA
BN CEN 125.75

CTAF+AFRU
127.5

AFRU+PAL
127.5

Bearings are Magnetic
Elevations in FEET AMSL

Holding at ARM NDB

TR IN TURN	TIME	MIN ALT	DME LMT
247° Left	1	6000	

ARM
NDB 401
DME 112.6

CAT C
247°
236°

CAT A & B
247°
236°

Scale 1:500,000

25 NM MSA
6100
ARM NDB

10 NM MSA 6000

NDB/DME

AD ELEV 3556

NOTES

CATEGORY	A	B	C	D
S-I NDB	4210 (679-3.9)			NOT APPLICABLE
S-I NDB/DME	4160 (629-3.6)			
CIRCLING	4390 (834-2.4)	4490 (934-4.0)		
ALTERNATE	(1334-4.4)	(1434-6.0)		

1. MAX IAS:
INITIAL : 210KT.

ARMNB01-184

NDB RWY 23
ARMIDALE, NSW (YARM)

AWIS
134.75

FIA
BN CEN 125.75

CTAF+AFRU
127.5

AFRU+PAL
127.5

NAVAID RQ:
• DME

Holding at ARM NDB

TR	TURN	TIME	MIN ALT	DME LMT
081°	Left	1	6000	

ARM
NDB 401
DME 112.6

Scale 1:500,000 5NM

25 NM MSA
6100

ARM NDB


10 NM MSA 6000

AD ELEV 3556
Bearings are Magnetic
Elevations in FEET AMSL

DIST TO ARM DME	2.1	3	4	5	5.8	6	7	8					
ALT (3° APCH PATH)	4100	4400	4720	5030	5300	5350	5660	6000					

TRACK 233°. CLIMB TO 6100ft.

GNSS permitted in lieu of DME
Reference waypoint ARM NDB

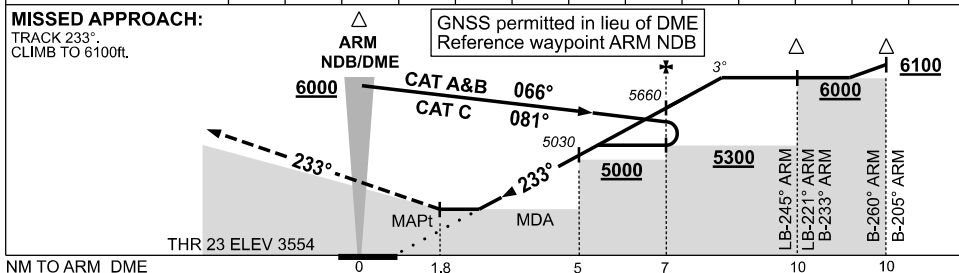

CATEGORY	A	B	C	D
S-I NDB/DME	4100 (544-3.1)			NOT APPLICABLE
CIRCLING	4390 (834-2.4)		4490 (934-4.0)	
ALTERNATE	(1334-4.4)		(1434-6.0)	

1. MAX IAS:
INITIAL : 210KT.

ARMNB02-184