


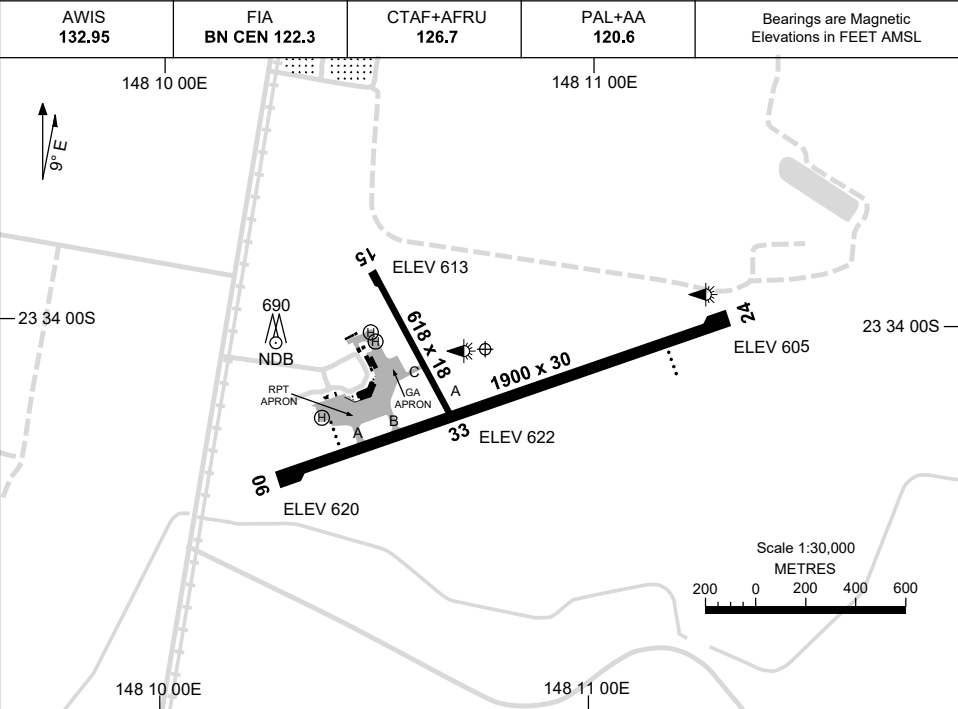


RWY	AERODROME LIGHTING	
	RL : PAL+AA 120.6 , SDBY (30 SEC)	
06 062	PAPI 3.0° 45FT LIRL	
242 24	PAPI 3.0° 45FT LIRL	
15 143	NIL	
323 33	NIL	

NOTES	
1. AWIS ACTIVATED BY 1 SEC TRANSMIT PULSE.	

GNSS ARRIVAL PROCEDURES
EMERALD, QLD (YEML)

16 JUN 2022


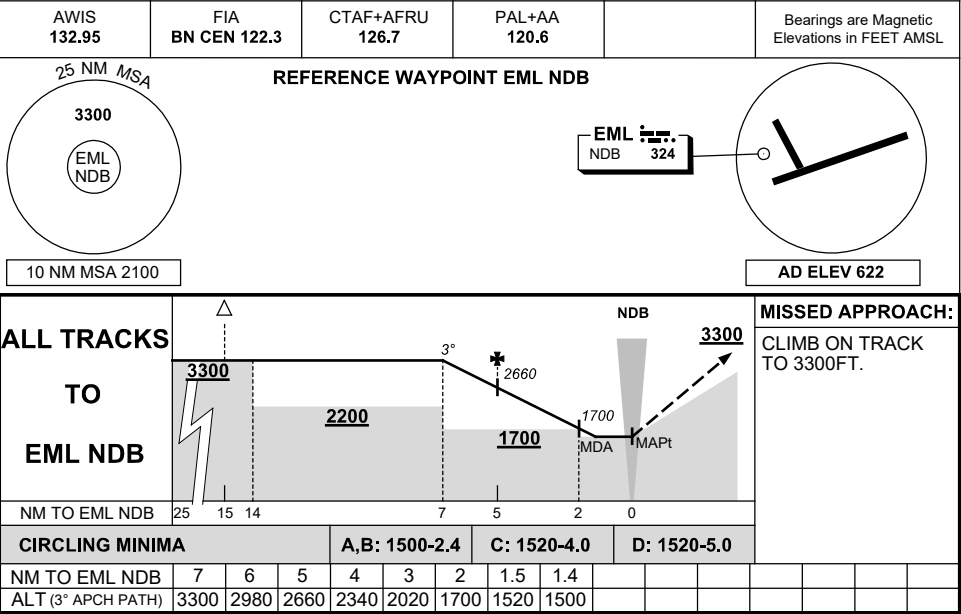


USE QNH

RNP RWY 06

16 JUN 2022

EMERALD, QLD (YEML)

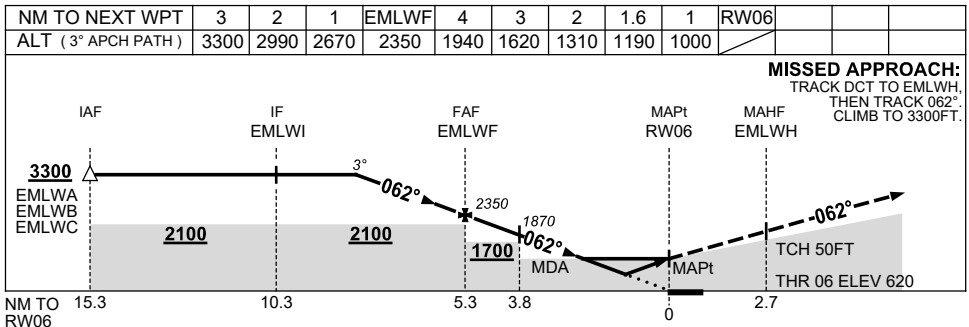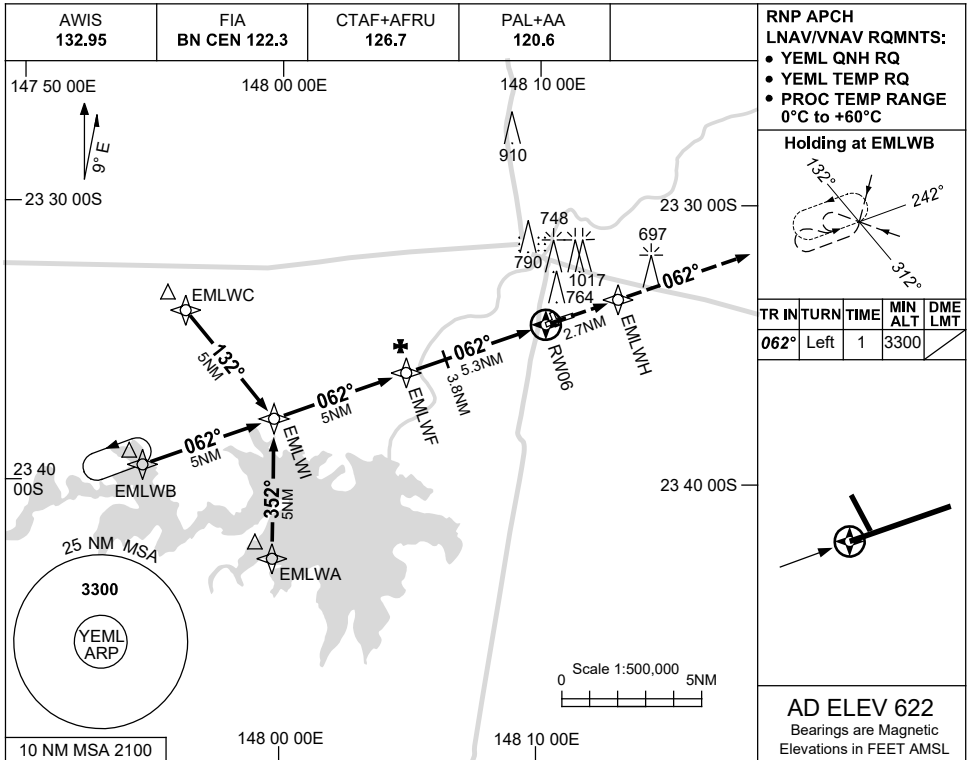

NOTES

CATEGORY	A	B	C	D
LNAV/VNAV	1000 (380-2.1)			
LNAV	1190 (570-3.2)			
CIRCLING	1420 (798-2.4)	1520 (898-4.0)	1520 (898-5.0)	
ALTERNATE	(1298-4.4)	(1398-6.0)	(1398-7.0)	

1. MAX IAS :
 HOLDING: 210KT.
 INITIAL : 210KT.



Changes: CHART TITLE, PBN SPECIFICATION BOX, PAL+AA.

EMLGN01-171

USE QNH

RNP RWY 24
EMERALD, QLD (YEML)

21 MAR 2024

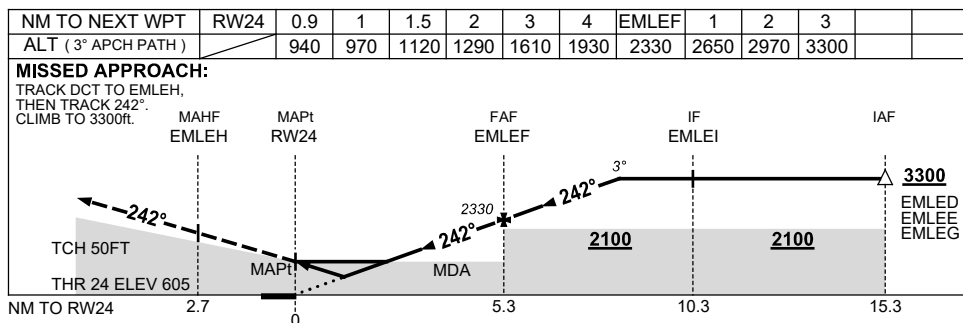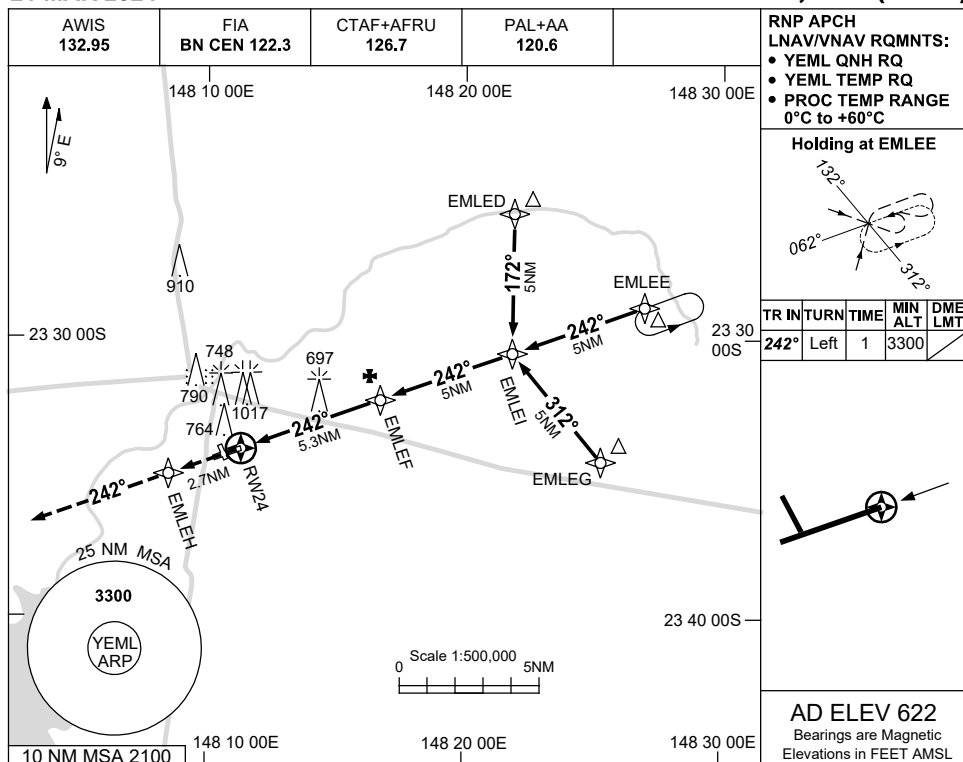

NOTES

CATEGORY	A	B	C	D
LNAV/VNAV	940 (335-1.9)			
LNAV	1120 (515-2.9)			
CIRCLING	1420 (798-2.4)		1520 (898-4.0)	1520 (898-5.0)
ALTERNATE	(1298-4.4)		(1398-6.0)	(1398-7.0)

1. MAX IAS :
HOLDING : 210KT.
INITIAL : 210KT.

Changes: ALTERNATE VISIBILITY, Editorial.

EMLGN02-178

NDB RWY 24
EMERALD, QLD (YEML)

AWIS 132.95	FIA BN CEN 122.3	CTAF+AFR 126.7	PAL+AA 120.6
------------------------------	-----------------------------------	---------------------------------	-------------------------------

148 00 00E
148 10 00E
148 20 00E

23 30 00S
23 30 00S
23 40 00S

TR IN	TURN	TIME	MIN ALT	DME LMT
095°	Left	1	3300	

23 40 00S
23 40 00S

148 10 00E
148 20 00E

Scale 1:500,000

0 5 NM

10 NM MSA 2100

25 NM MSA 3300

EML NDB

910

748

790

764

1017

697

251°

083°

095°

251°

CAT A&B

CAT C&D

EML NDB 324

Bearings are Magnetic Elevations in FEET AMSL

Holding at EML NDB

165°

275°


345°

NDB

AD ELEV 622

[illegible]

TRACK 251°.
CLIMB TO 3300FT.

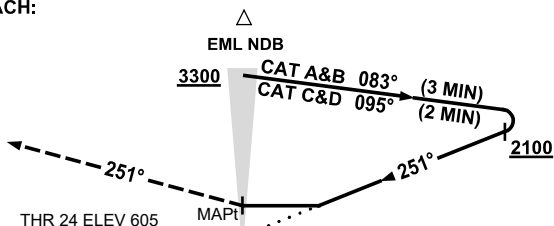

1. MAX IAS:
INITIAL :
CAT C&D 210KT.

CATEGORY	A	B	C	D
S-I NDB	1320 (715-4.1)			
CIRCLING	1420 (798-2.4)		1520 (898-4.0)	1520 (898-5.0)
ALTERNATE	(1298-4.4)		(1398-6.0)	(1398-7.0)

EMLNB01-171