



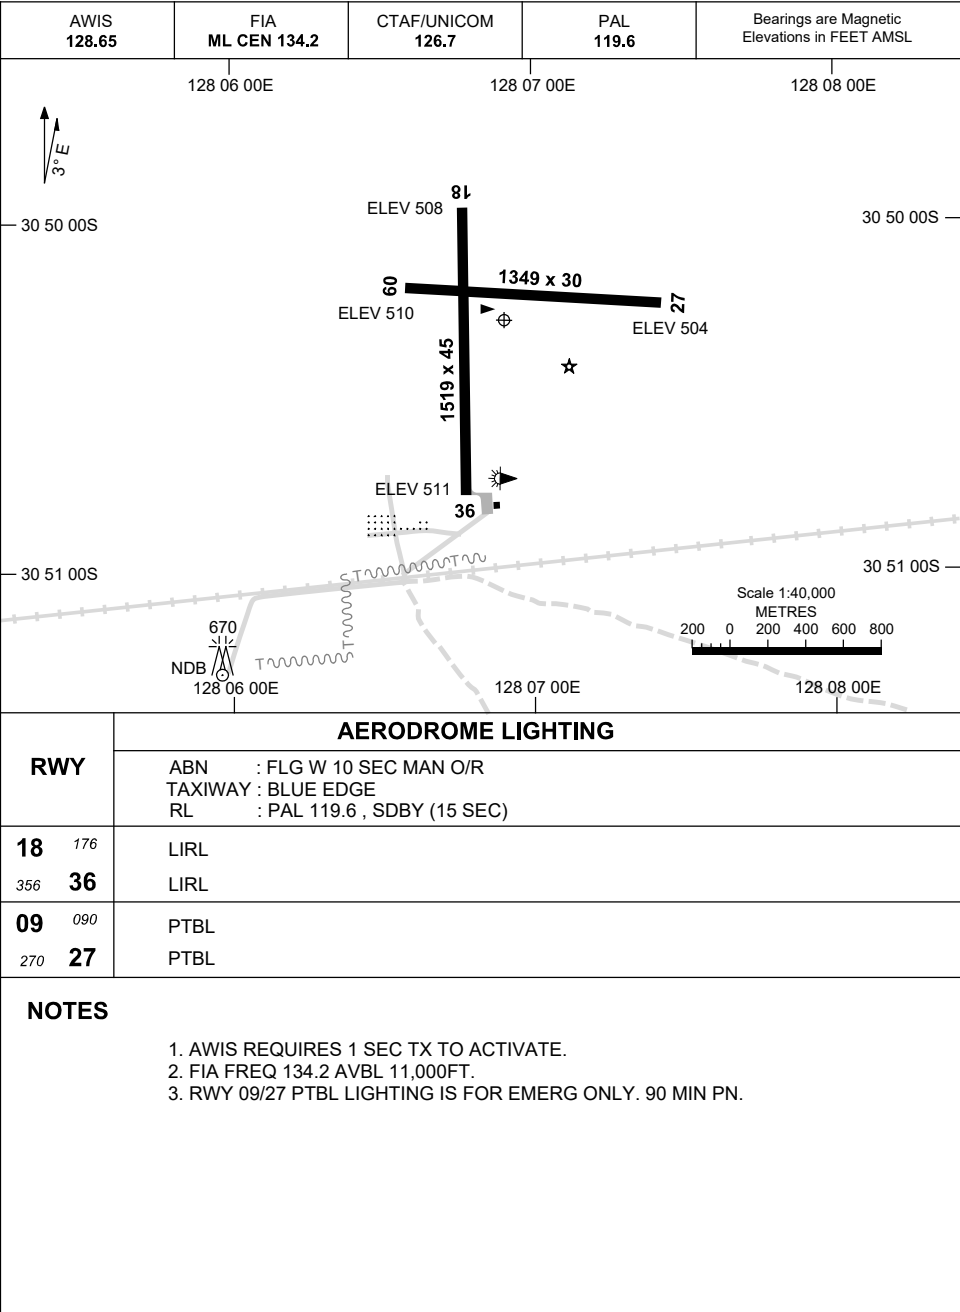

GNSS ARRIVAL PROCEDURES
FORREST, WA (YFRT)



25 MAY 2017

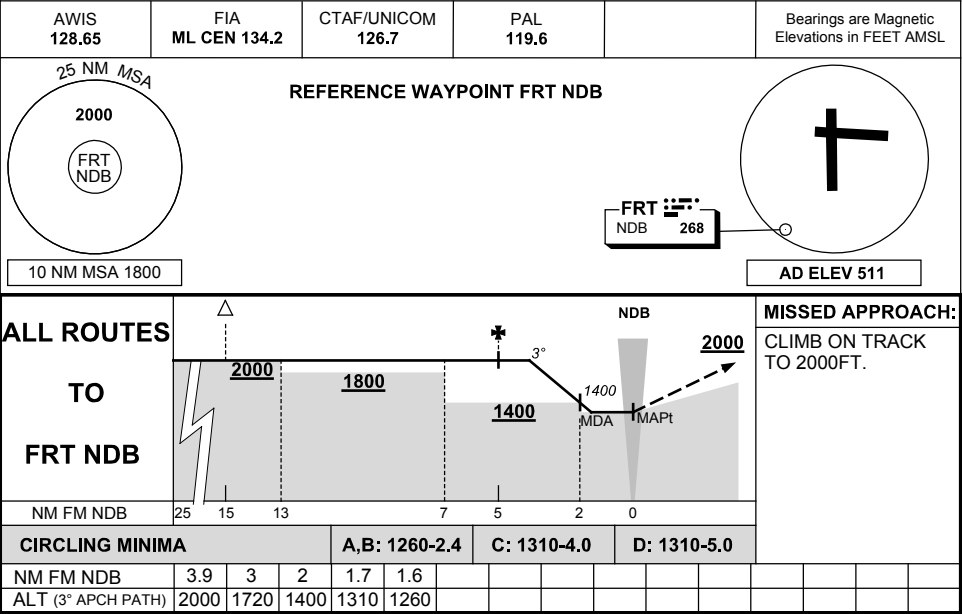

USE QNH

RNP RWY 18
FORREST, WA (YFRT)

30 NOV 2023

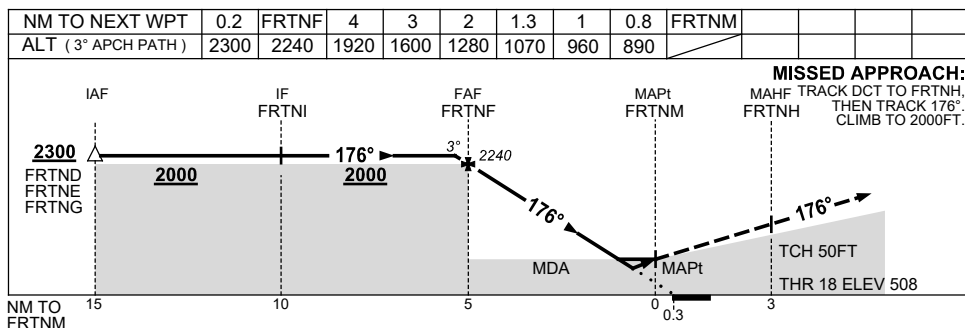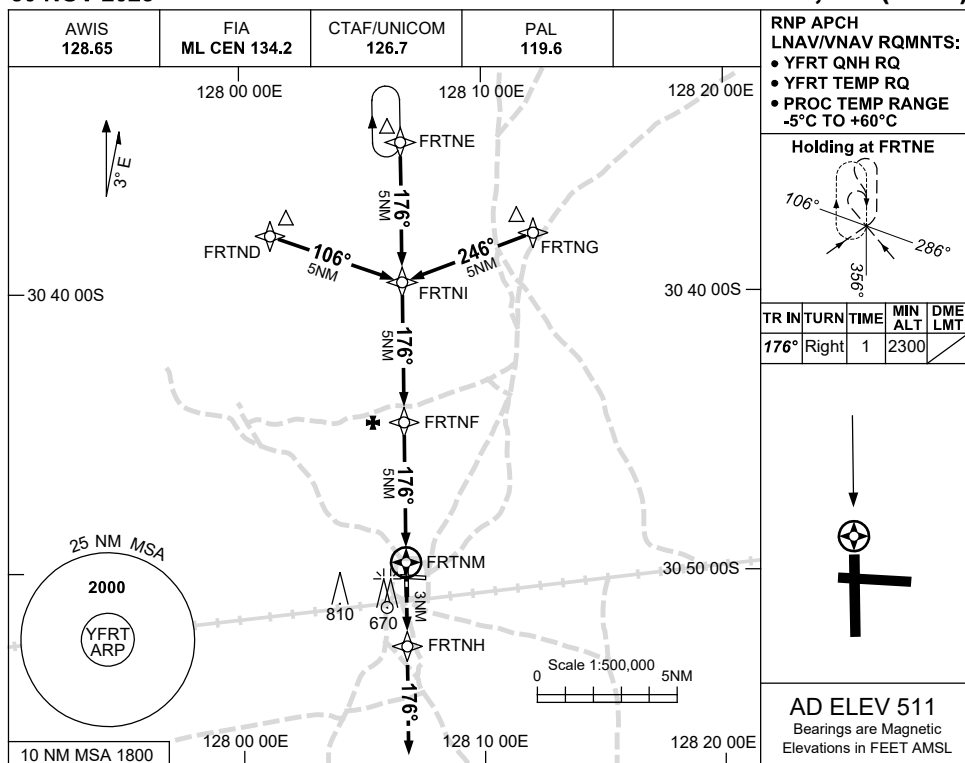

NOTES

CATEGORY	A	B	C	D
LNAV/VNAV	890 (382-2.1)			
LNAV	1070 (559-3.2)			
CIRCLING	1210 (699-2.4)	1310 (799-4.0)	1310 (799-5.0)	
ALTERNATE	(1199-4.4)	(1299-6.0)	(1299-7.0)	

1. MAX IAS:
INITIAL : 210KT.

Changes: LNAV/VNAV MINIMA, THR ELEV.

FRTGN01-177

RNP RWY 27
FORREST, WA (YFRT)

AWIS 128.65	FIA ML CEN 134.2	CTAF/UNICOM 126.7	PAL 119.6
------------------------------	-----------------------------------	------------------------------------	----------------------------

25 NM MSA
2000
YFRT ARP

10 NM MSA 1800

Scale 1:500,000
5NM

3° E

270°
3NM
5NM
270°
5NM
270°
5NM
270°
5NM
270°
5NM
340°
5NM
200°
5NM

FRTEH
FRTEM
FRTEF
FRTEI
FRTEB
FRTEC
FRTEA

8100
6700
8200

30 50 00S
31 00 00S

128 00 00E
128 10 00E
128 20 00E

TR IN	TURN	TIME	MIN ALT	DME LMT
270°	Right	1	2300	


RNP APCH
LNAV/VNAV RQMNTS:
 • YFRT QNH RQ
 • YFRT TEMP RQ
 • PROC TEMP RANGE
 -5°C TO +60°C

Holding at FRTEB

AD ELEV 511
 Bearings are Magnetic
 Elevations in FEET AMSL

NM TO NEXT WPT	FRTEM	0.8	1	1.4	2	3	4	FRTEF	0.2				
ALT (3° APCH PATH)		890	960	1070	1280	1600	1910	2230	2300				

TRACK DCT TO FRTEH,
THEN TRACK 270°.
CLIMB TO 2000FT.

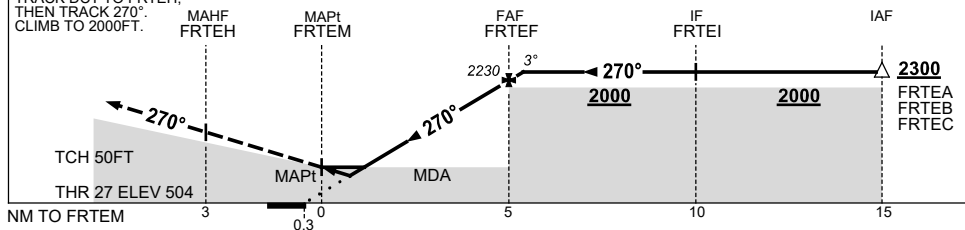

CATEGORY	A	B	C	D
LNAV/VNAV		890	(386-2.2)	
LNAV		1070	(559-3.2)	
CIRCLING	1210	(699-2.4)	1310	(799-4.0)
ALTERNATE		(1199-4.4)	(1299-6.0)	(1299-7.0)



Changes: LNAV/VNAV, LNAV MINIMA, THR ELEV.

FRTGN02-177

USE QNH

NDB RWY 18
FORREST, WA (YFRT)

30 NOV 2023

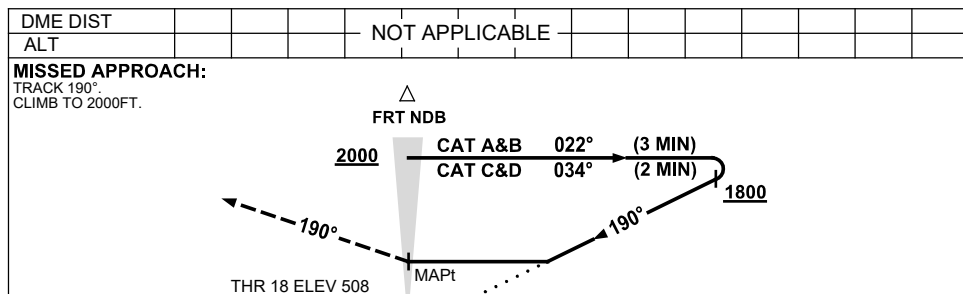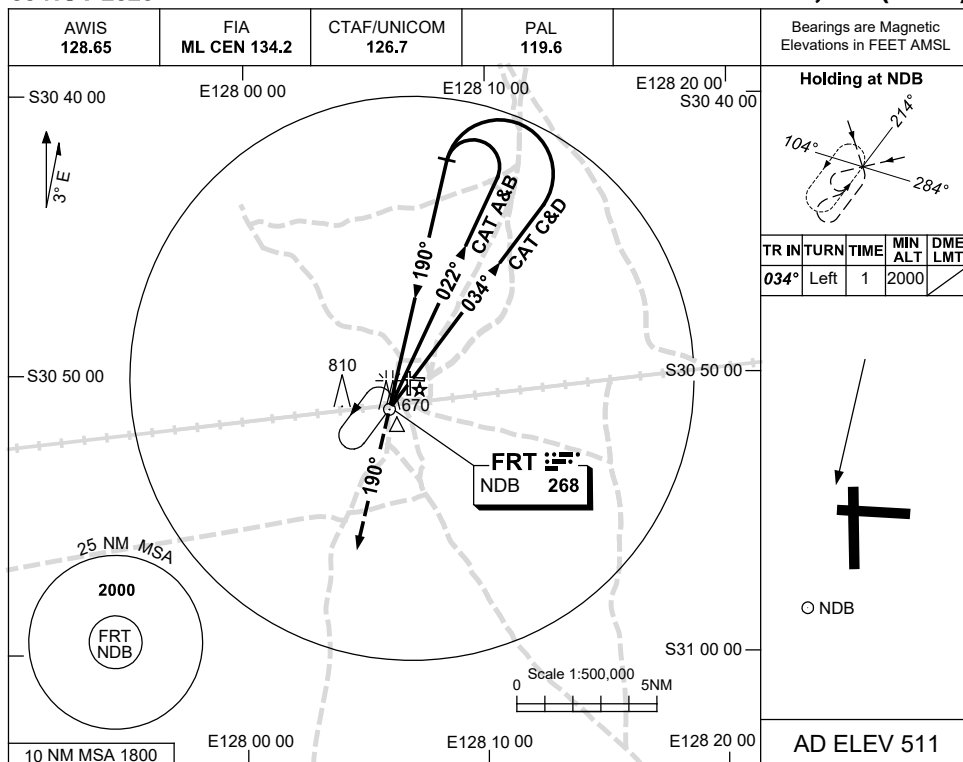**NOTES**

1. MAX IAS:
INITIAL :
CAT C&D : 210KT.

CATEGORY	A	B	C	D
S-I NDB	1180 (669-3.8)			
CIRCLING	1210 (699-2.4)	1310 (799-4.0)	1310 (799-5.0)	
ALTERNATE	(1199-4.4)	(1299-6.0)	(1299-7.0)	

Changes: THR ELEV.

FRTNB01-177