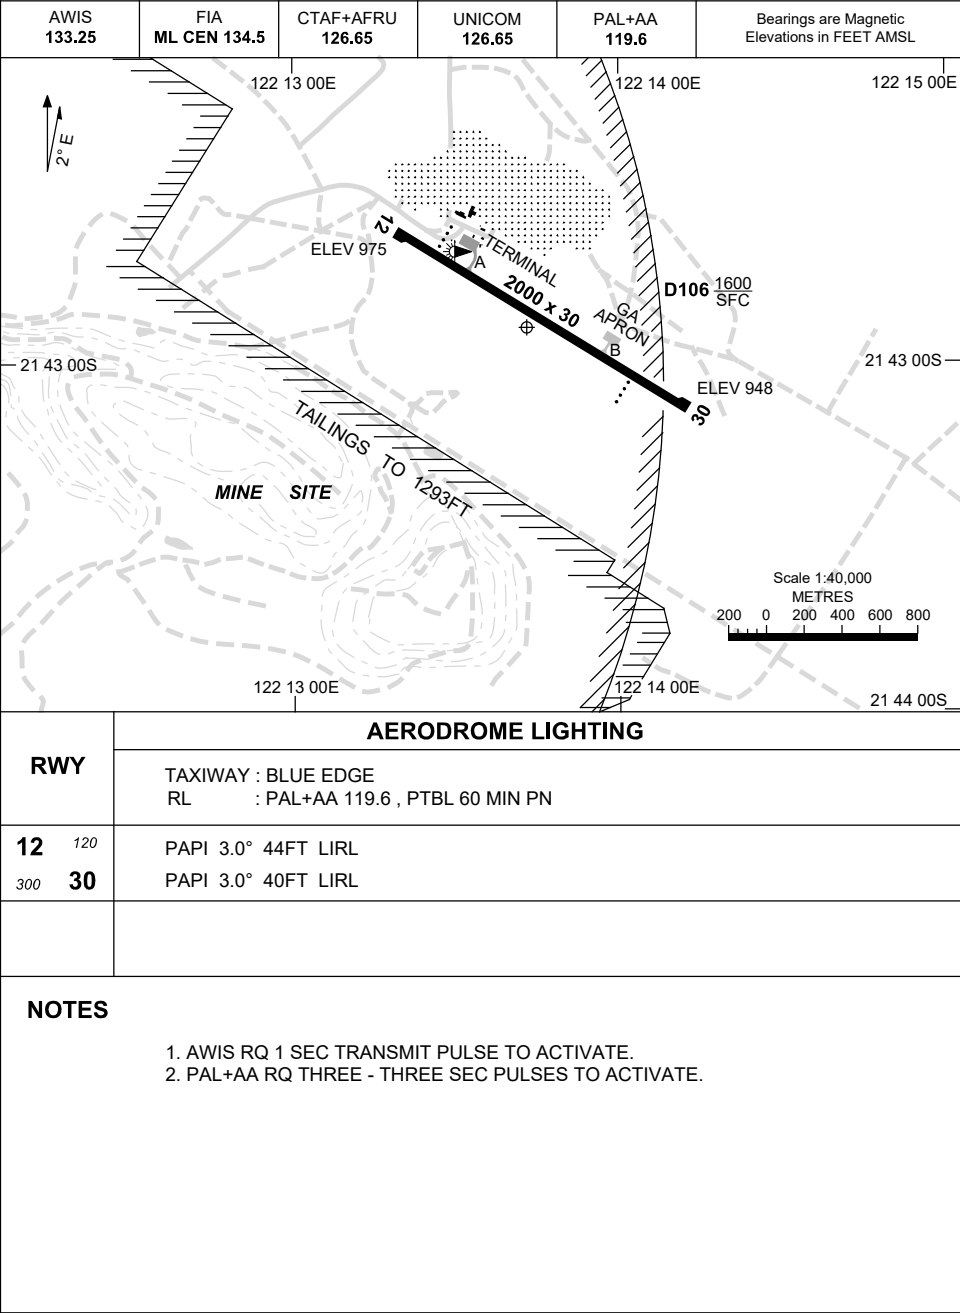




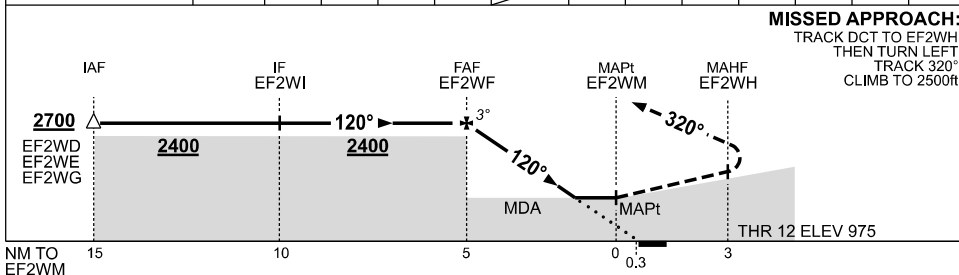
RNP RWY 12
TELFER, WA (YTEF)

AWIS 133.25	FIA ML CEN 134.5	CTAF+AFRU 126.65	UNICOM 126.65	PAL+AA 119.6	RNP APCH
----------------	---------------------	---------------------	------------------	-----------------	----------

TR	TURN	TIME	MIN ALT	DME LMT
120°	Right	1	2700	

AD ELEV 975
Bearings are Magnetic
Elevations in FEET AMSL

NO CIRCLING

[illegible]

MISSED APPROACH:
TRACK DCT TO EF2WH
THEN TURN LEFT
TRACK 320°
CLIMB TO 2500ft

CATEGORY	A	B	C	D
LNAV	1610 (635-3.6)			NOT APPLICABLE
CIRCLING*	1770 (795-2.4)		1870 (895-4.0)	
ALTERNATE	(1295-4.4)		(1395-6.0)	

1. MAX IAS:
INITIAL : 210KT.
2. **CAUTION:** CHECK
WITH UNICOM FOR
BLASTING TIMES.
- * 3. NO CIRCLING SW
OF RWY 12 / 30.

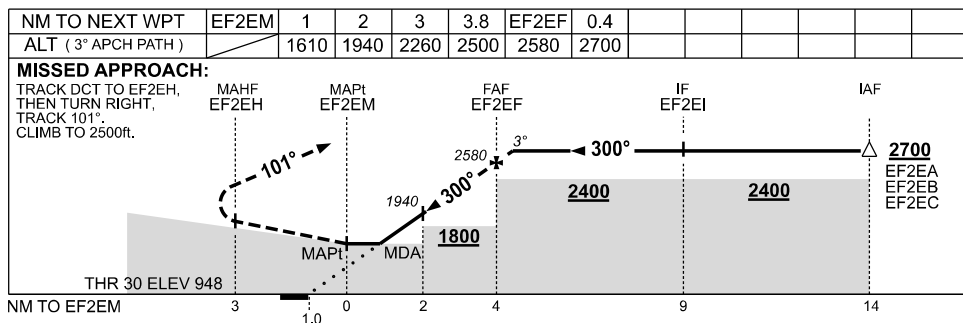
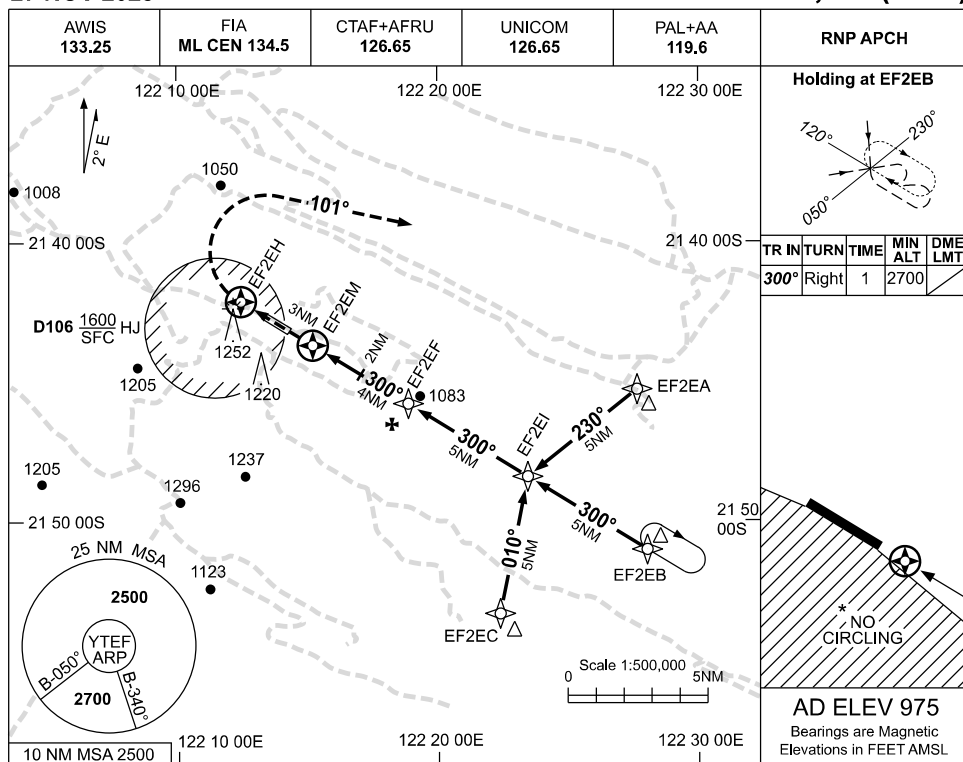
TEFGN01-185

USE QNH

RNP RWY 30

27 NOV 2025

TELFER, WA (YTEF)

**NOTES**

1. MAX IAS:
INITIAL : 210KT.
2. **CAUTION:** CHECK
WITH UNICOM FOR
BLASTING TIMES.
3. NO CIRCLING SW
OF RWY 12 / 30.

Changes: REMOVED LIT OBST 1376ft.

TEFGN02-185