


AWIS 134.75	FIA BN CEN 125.75	CTAF+AFRU 127.5	AFRU+PAL 127.5		Bearings are Magnetic Elevations in FEET AMSL
----------------	----------------------	--------------------	-------------------	--	--

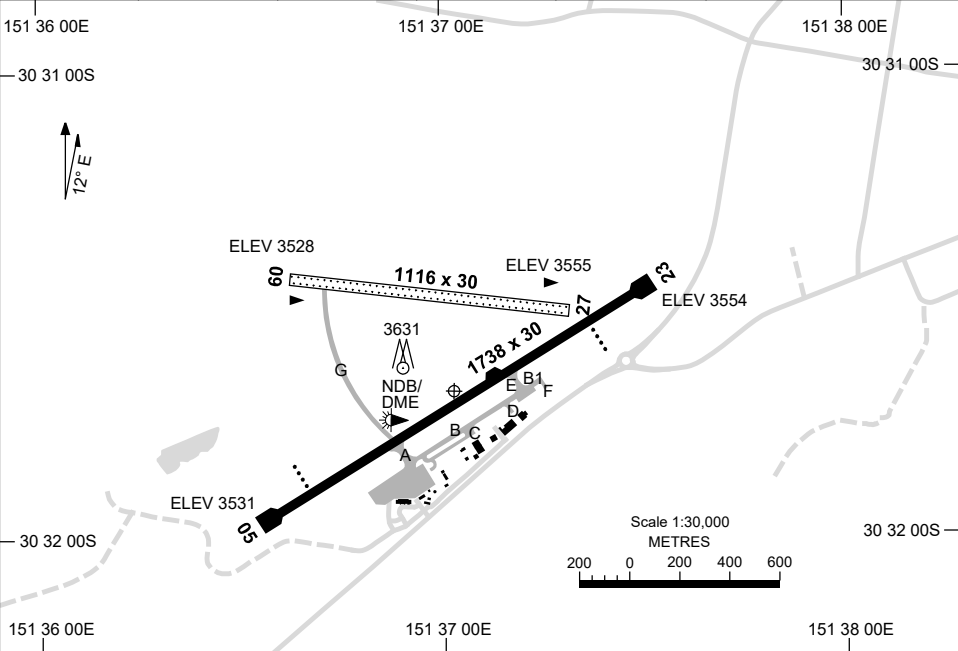


RWY	AERODROME LIGHTING	
	TAXIWAY : BLUE EDGE RL : AFRU+PAL 127.5 , SDBY (15 SEC)	
05 ⁰⁴⁷ 227 23	PAPI 3.0° 47FT MIRL RTIL PAPI 3.0° 46FT MIRL RTIL	
09 ⁰⁸⁵ 265 27	NIL NIL	

NOTES

DME or GNSS ARRIVAL PROCEDURES
ARMIDALE, NSW (YARM)

04 SEP 2025

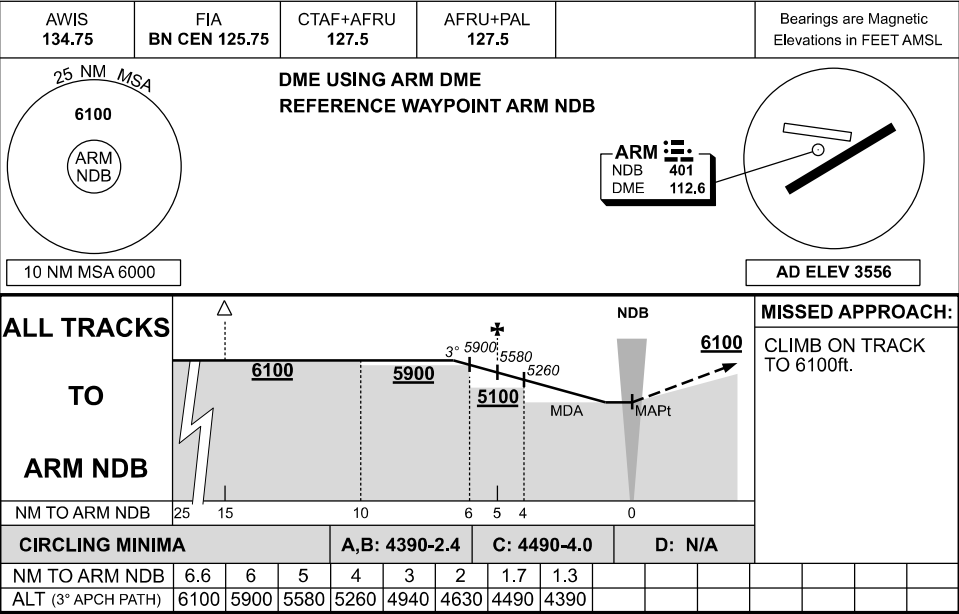

RNP RWY 23
ARMIDALE, NSW (YARM)

AWIS 134.75 **FIA BN CEN 125.75** **CTAF+AFRU 127.5** **AFRU+PAL 127.5**

151 30 00E 151 40 00E 151 50 00E

30 20 00S

3773

4954

4594

3904

3675

12° E

ARMEA

4469

ARMEB

3928

ARMEI

227° 5NM

227° 5NM

297° 5NM

3904

3904

30 20 00S

30 30 00S

3757

ARMEB

3626

3917

ARMET

212° 3NM

3617

3760

151 30 00E

151 40 00E

151 50 00E

30 40 00S

3730

3878

25 NM MSA

6100

YARM ARP

10 NM MSA 6000

Scale 1:500,000

0 5NM

RNP APCH
RNAV/VNAV RQMNTS:
 • YARM QNH RQ
 • YARM TEMP RQ
 • PROC TEMP RANGE
 -7°C TO +54°C

Holding at ARMEB

117°
 047°
 297°

TR IN	TURN	TIME	MIN ALT	DME LMT
227°	Left	1	6100	

AD ELEV 3556
 Bearings are Magnetic
 Elevations in FEET AMSL

NM TO NEXT WPT	ARMEM	0.7	1.3	2	3	4	ARMEF	1	2	2.6			
ALT (3° APCH PATH)		3900	4090	4330	4650	4960	5280	5600	5920	6100			

MISSED APPROACH:
 TURN LEFT,
 TRACK DCT TO ARMET,
 THEN TRACK 199°.
 CLIMB TO 6100ft.

MAHF ARMET
 MAPt ARMED
 FAF ARMEF
 IF ARMEI
 IAF

199°
 227°
 3°

5000
 5280
 5600
 6100

TCH 50FT
 THR 23 ELEV 3554

MAPt MDA

NM TO ARMED
 NM TO NEXT WPT
 NM TO NEXT WPT

0.3
 3
 5
 10
 15

ARMED
 ARMEC
 ARMEF
 ARMEI
 ARMEA

1. MAX IAS:
INITIAL : 210KT.

CATEGORY	A	B	C	D
LNAV/VNAV		3900 (346-1.9)		NOT APPLICABLE
LNAV		4090 (534-3.0)		
CIRCLING	4390 (834-2.4)		4490 (934-4.0)	
ALTERNATE		(1334-4.4)	(1434-6.0)	



ARMGN01-184

USE QNH

RNP RWY 05

04 SEP 2025

ARMIDALE, NSW (YARM)

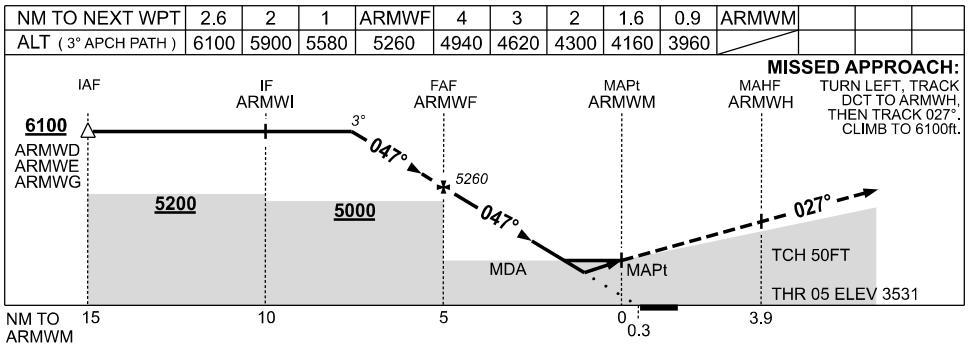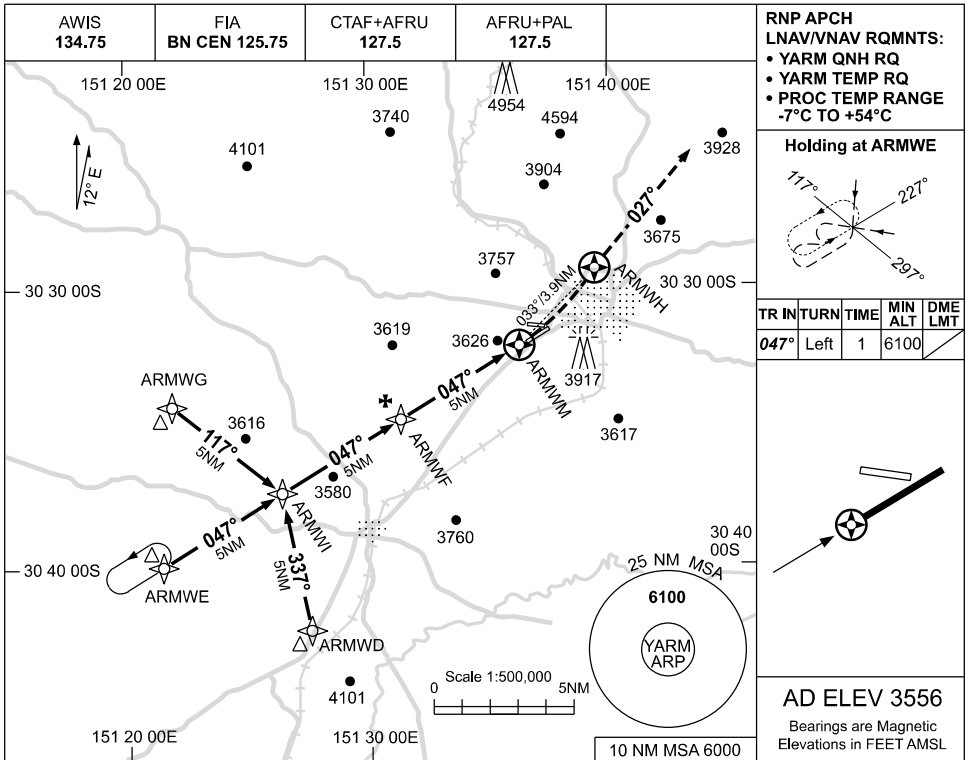

NOTES

 1. MAX IAS:
 INITIAL : 210KT.

CATEGORY	A	B	C	D
LNAV/VNAV	3960 (429-2.4)			NOT APPLICABLE
LNAV	4160 (629-3.6)			
CIRCLING	4390 (834-2.4)		4490 (934-4.0)	
ALTERNATE	(1334-4.4)		(1434-6.0)	

Changes: CIRCLING MINIMA, ALTERNATE MINIMA.

ARMGN02-184

NDB RWY 05
ARMIDALE, NSW (YARM)

AWIS
134.75

FIA
BN CEN 125.75

CTAF+AFRU
127.5

AFRU+PAL
127.5

Bearing elevations in FEET AMSL

Holding at ARM NDB

TR IN TURN	TIME	MIN ALT	DME LMT
247° Left	1	6000	

ARM
NDB
DME 112.6

CAT C
247°
236°

CAT A & B
236°

Scale 1:500,000

25 NM MSA
6100
ARM NDB

10 NM MSA 6000

NDB/DME

AD ELEV 3556

NOTES

CATEGORY	A	B	C	D
S-I NDB	4210 (679-3.9)			NOT APPLICABLE
S-I NDB/DME	4160 (629-3.6)			
CIRCLING	4390 (834-2.4)	4490 (934-4.0)		
ALTERNATE	(1334-4.4)	(1434-6.0)		



1. MAX IAS:
INITIAL : 210KT.

ARMNB01-184

USE QNH

NDB RWY 23
ARMIDALE, NSW (YARM)

04 SEP 2025

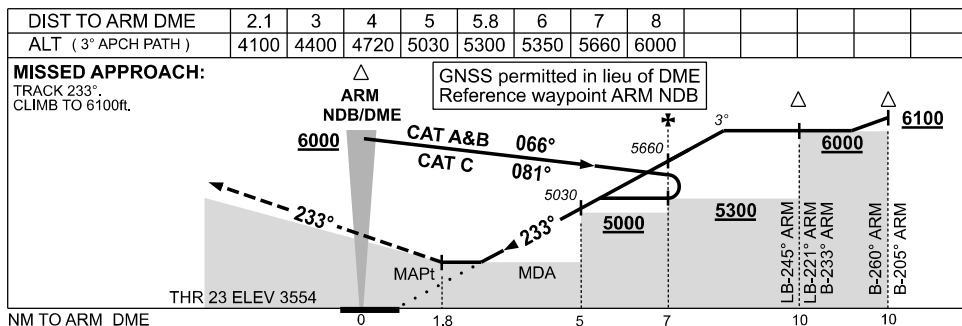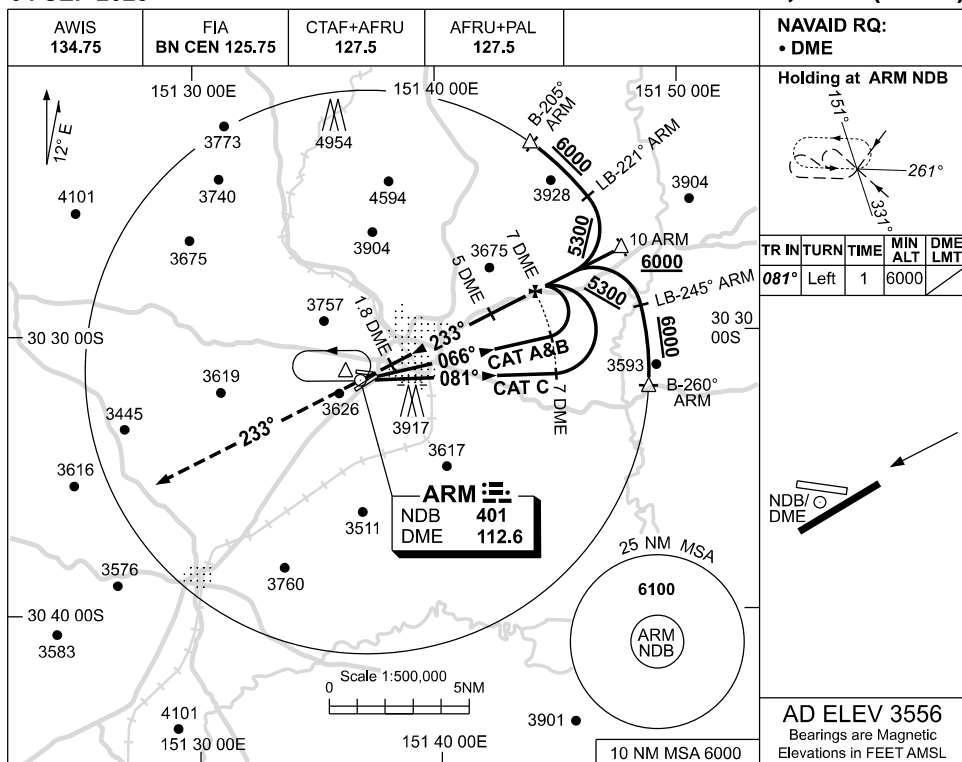**NOTES**

CATEGORY	A	B	C	D
S-I NDB/DME	4100 (544-3.1)			NOT APPLICABLE
CIRCLING	4390 (834-2.4)		4490 (934-4.0)	
ALTERNATE	(1334-4.4)		(1434-6.0)	

1. MAX IAS:
INITIAL : 210KT.

Changes: CIRCLING MINIMA, ALTERNATE MINIMA.

ARMNB02-184