


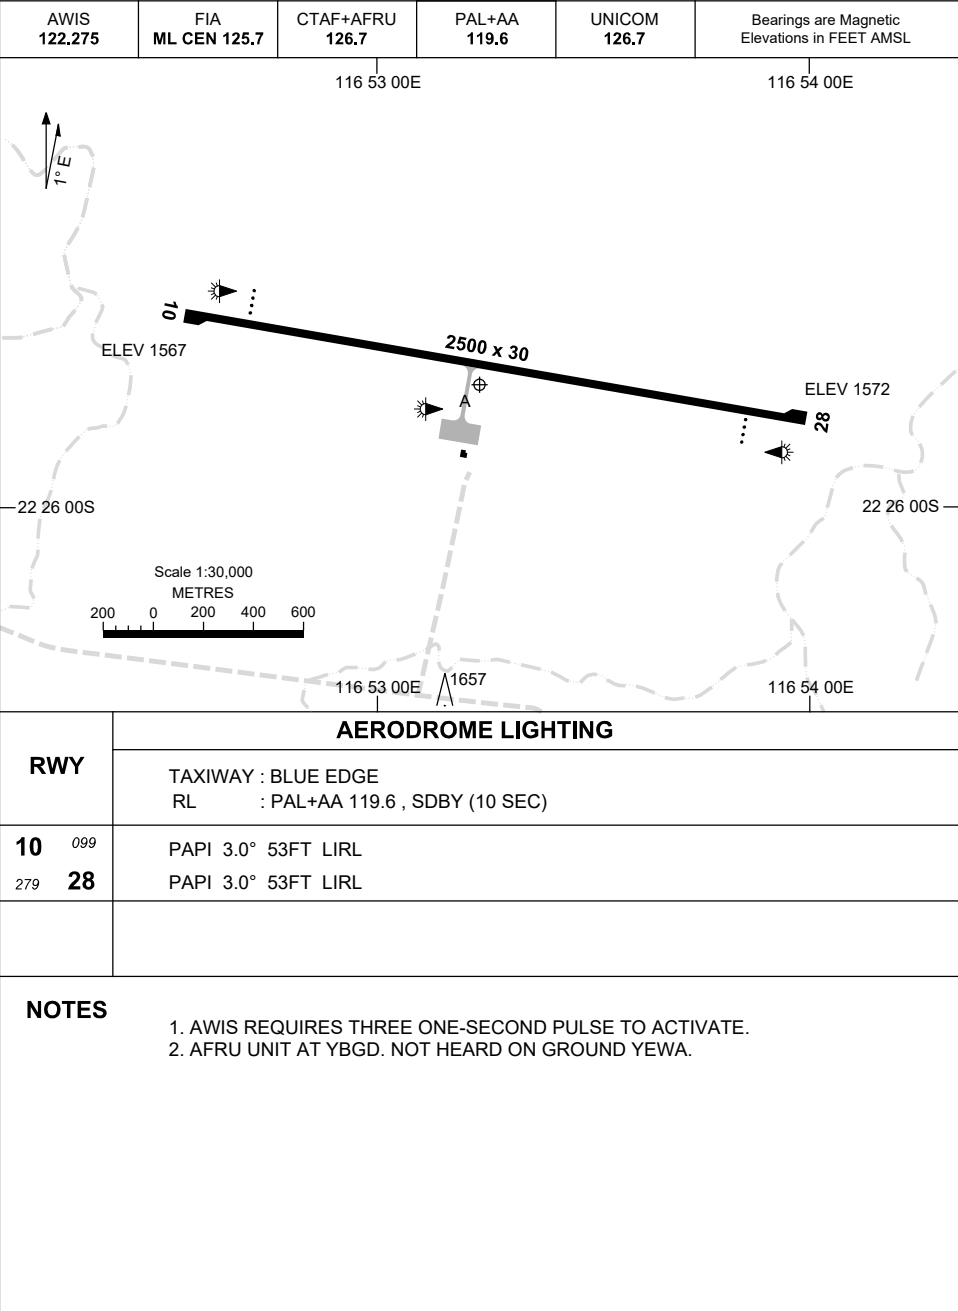

RNP RWY 10
ELIWANA, WA (YEWA)

AWIS 122.275 **FIA ML CEN 125.7** **CTAF+AFRU 126.7** **PAL+AA 119.6** **UNICOM 126.7**

RNP APCH LNAV/VNAV RQMNTS:
 • YEWA QNH and TEMP RQ
 • PROC TEMP RANGE 0°C to +60°C

Holding at EW2WD

TR IN	TURN	TIME	MIN ALT	DME LMT
099°	Right	1	4900	

AD ELEV 1576
 Bearings are Magnetic
 Elevations in FEET AMSL

25 NM MSA
4900
YEWA ARP

10 NM MSA 4500

Scale 1:500,000 5NM

EW2WI	4	3	2	1	EW2WF	4	3	2	1.8	1.2	RW10	NM TO NEXT WPT
4900	4570	4250	3940	3620	3300	2890	2570	2250	2190	2000		ALT (3° APCH PATH)

MISSED APPROACH:
TRACK DCT TO EW2WH,
THEN TURN LEFT,
TRACK 077°.
CLIMB TO 4900FT.

4900
EW2WC
EW2WD
EW2WE

3400

2500

2400

2400

099°

099°

077°

IAF

IF EW2WI

FAF EW2WF

MAPt

MAHF EW2WH

NM TO RW10

15.3

10.3

5.3

2.5

0

4.0

TCH 50FT
THR 10 ELEV 1567

1. MAX IAS :
INITIAL: 210KT
- *2. NO CIRCLING S
OF RWY 10/28
3. COLOUR: SEE SPEC
NOTICES
4. CAUTION: YBGD
PROCS ADJACENT
TO S



CATEGORY	A	B	C	D
LNAV/VNAV	2000 (432-2.4)			
LNAV	2190 (622-3.5)			
*CIRCLING	2440 (864-2.4)	2680 (1104-4.0)		NOT AUTHORISED
ALTERNATE	(1364-4.4)	(1604-6.0)		NOT APPLICABLE

EWAGN01-177

USE QNH

RNP RWY 28
ELIWANA, WA (YEWA)

30 NOV 2023

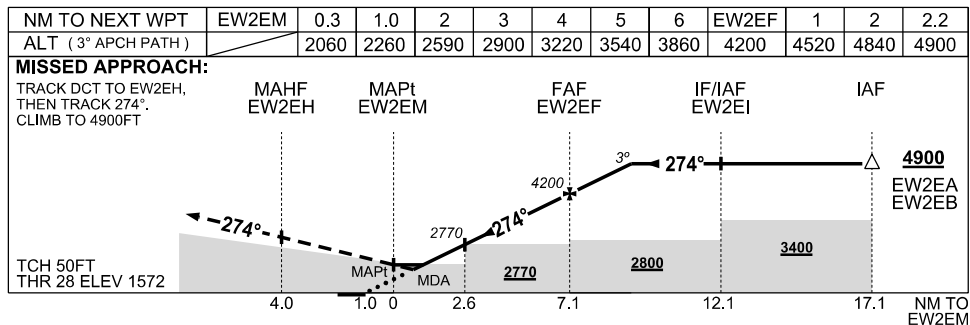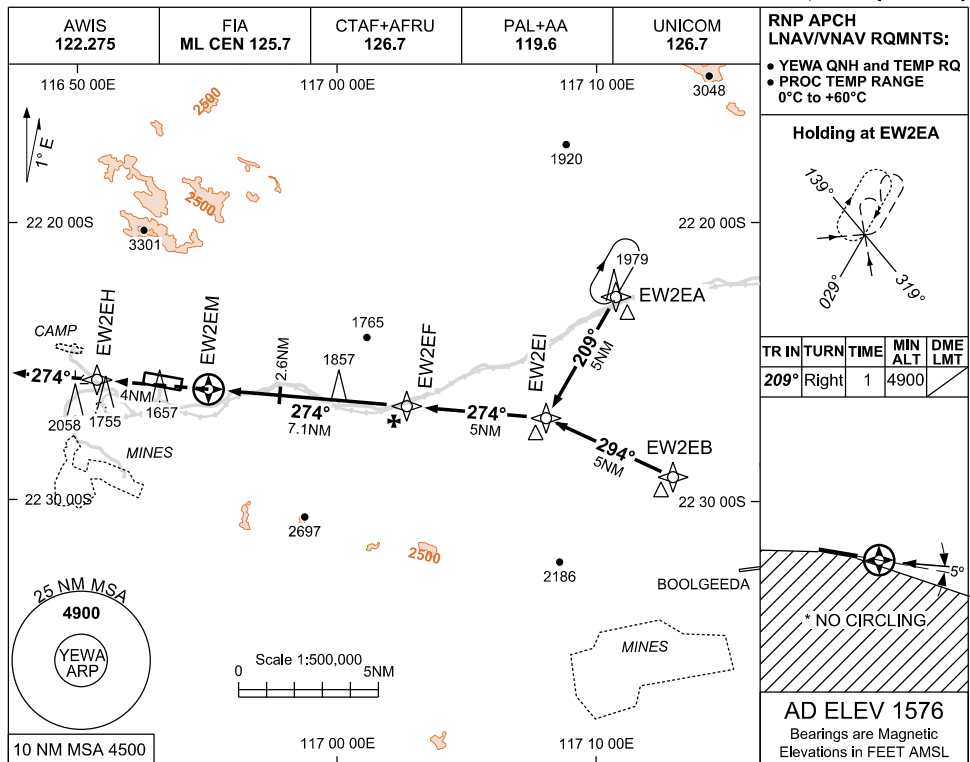

CATEGORY	A	B	C	D
LNAV/VNAV	2060 (488-2.8)			
LNAV	2260 (684-3.9)			
*CIRCLING	2440 (864-2.4)	2680 (1104-4.0)	NOT AUTHORISED	
ALTERNATE	(1364-4.4)	(1604-6.0)	NOT APPLICABLE	

- NOTES**
- MAX IAS : INITIAL: 210KT
 - NO CIRCLING S OF RWY 10/28
 - CLOUR: SEE SPEC NOTICES
 - CAUTION: YBGD PROCs ADJACENT TO S

Changes: CHART TITLE, WPT IDENT, EDITORIAL.

EWAGN02-177