


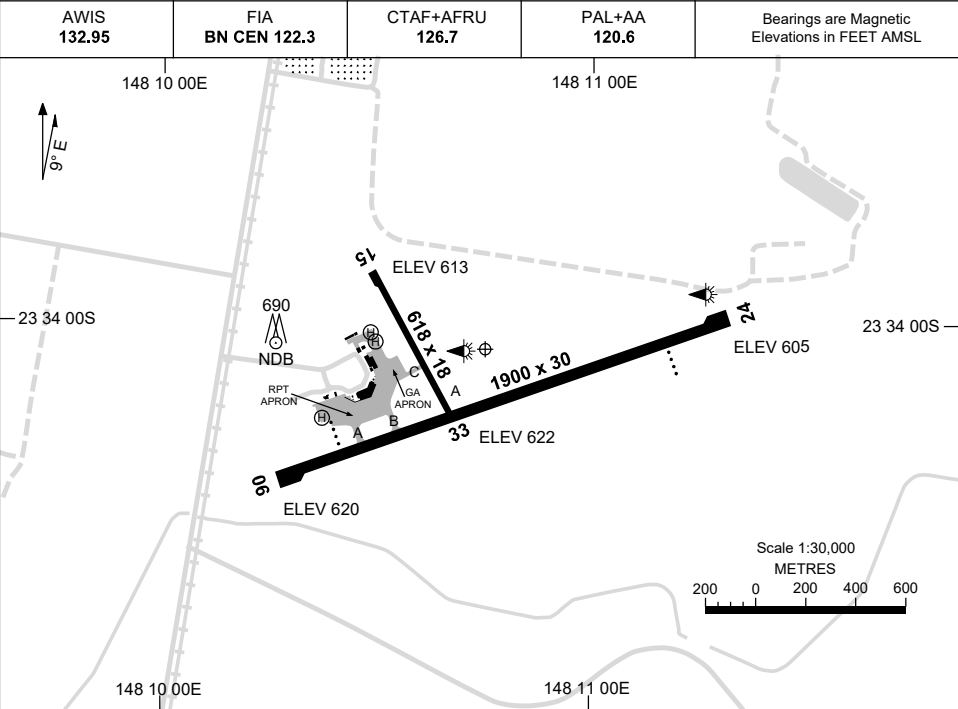


| RWY    | AERODROME LIGHTING                |  |
|--------|-----------------------------------|--|
|        | RL : PAL+AA 120.6 , SDBY (30 SEC) |  |
| 06 062 | PAPI 3.0° 45FT LIRL               |  |
| 242 24 | PAPI 3.0° 45FT LIRL               |  |
| 15 143 | NIL                               |  |
| 323 33 | NIL                               |  |

NOTES

1. AWIS ACTIVATED BY 1 SEC TRANSMIT PULSE.

GNSS ARRIVAL PROCEDURES  
EMERALD, QLD (YEML)

16 JUN 2022


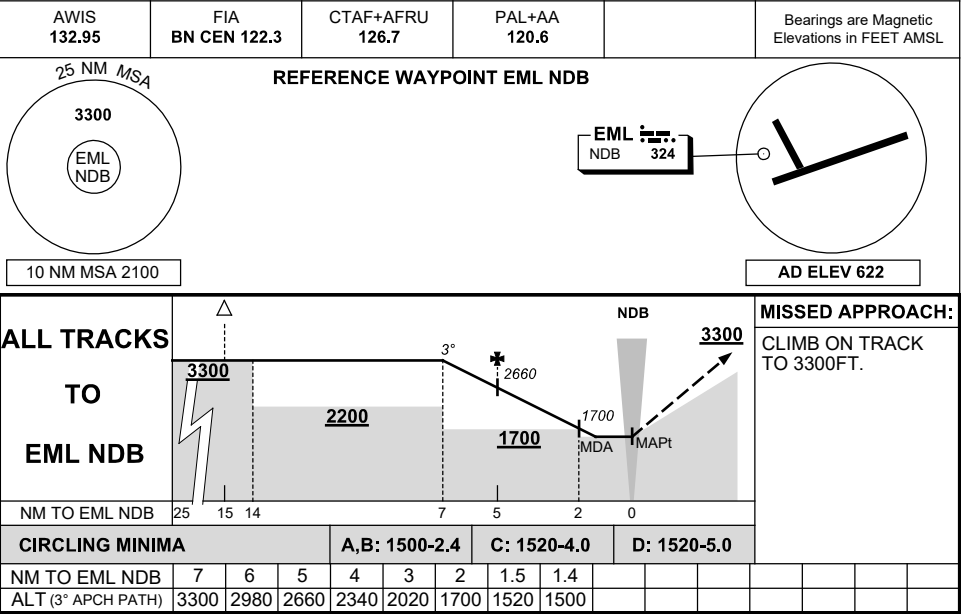


USE QNH

RNP RWY 06

16 JUN 2022

EMERALD, QLD (YEML)

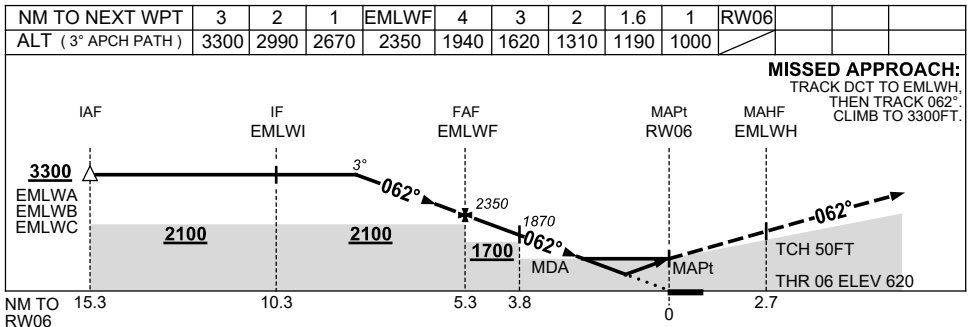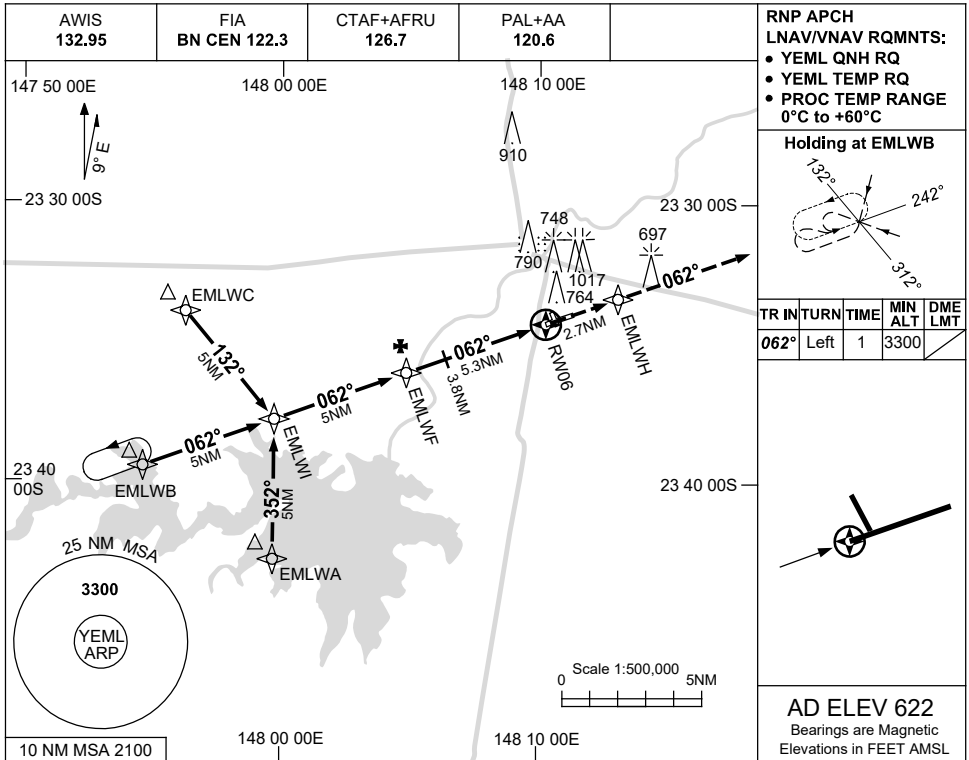

## NOTES

| CATEGORY  | A              | B              | C              | D |
|-----------|----------------|----------------|----------------|---|
| LNAV/VNAV | 1000 (380-2.1) |                |                |   |
| LNAV      | 1190 (570-3.2) |                |                |   |
| CIRCLING  | 1420 (798-2.4) | 1520 (898-4.0) | 1520 (898-5.0) |   |
| ALTERNATE | (1298-4.4)     | (1398-6.0)     | (1398-7.0)     |   |

1. MAX IAS :  
 HOLDING: 210KT.  
 INITIAL : 210KT.



Changes: CHART TITLE, PBN SPECIFICATION BOX, PAL+AA.

EMLGN01-171

USE QNH

RNP RWY 24  
EMERALD, QLD (YEML)

21 MAR 2024

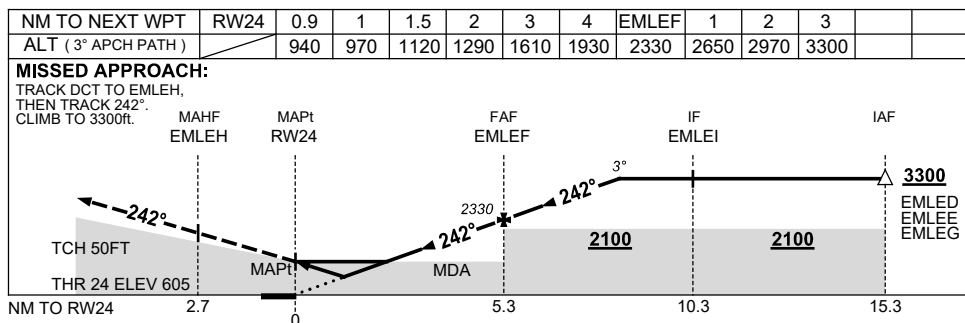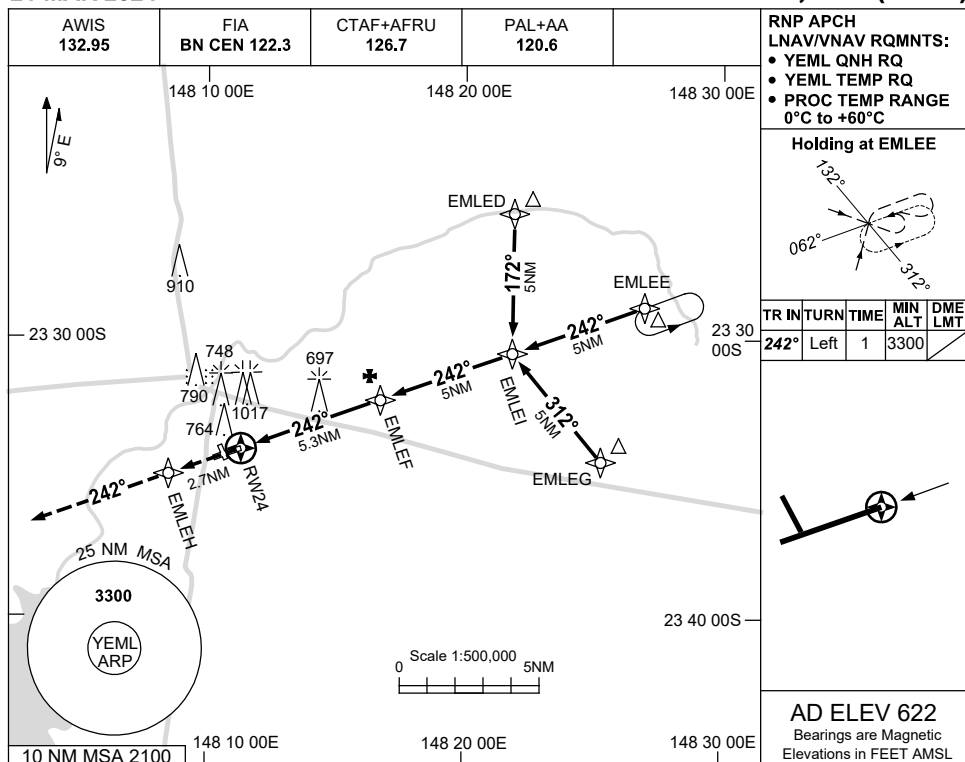

## NOTES

| CATEGORY  | A              | B              | C              | D |
|-----------|----------------|----------------|----------------|---|
| LNAV/VNAV | 940 (335-1.9)  |                |                |   |
| LNAV      | 1120 (515-2.9) |                |                |   |
| CIRCLING  | 1420 (798-2.4) | 1520 (898-4.0) | 1520 (898-5.0) |   |
| ALTERNATE | (1298-4.4)     | (1398-6.0)     | (1398-7.0)     |   |

1. MAX IAS :  
HOLDING : 210KT.  
INITIAL : 210KT.



Changes: ALTERNATE VISIBILITY, Editorial.

EMLGN02-178

USE QNH

NDB RWY 24  
EMERALD, QLD (YEML)

16 JUN 2022

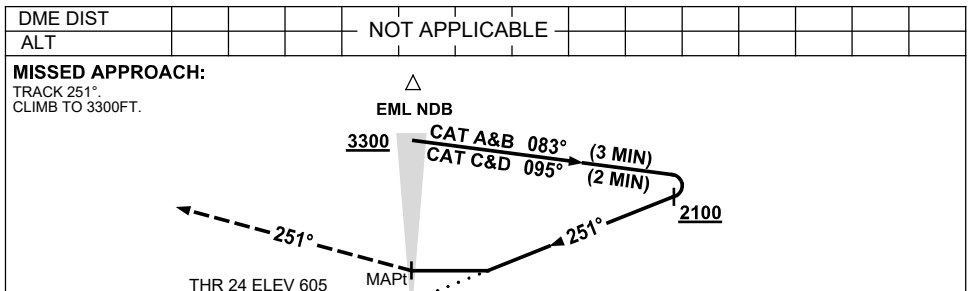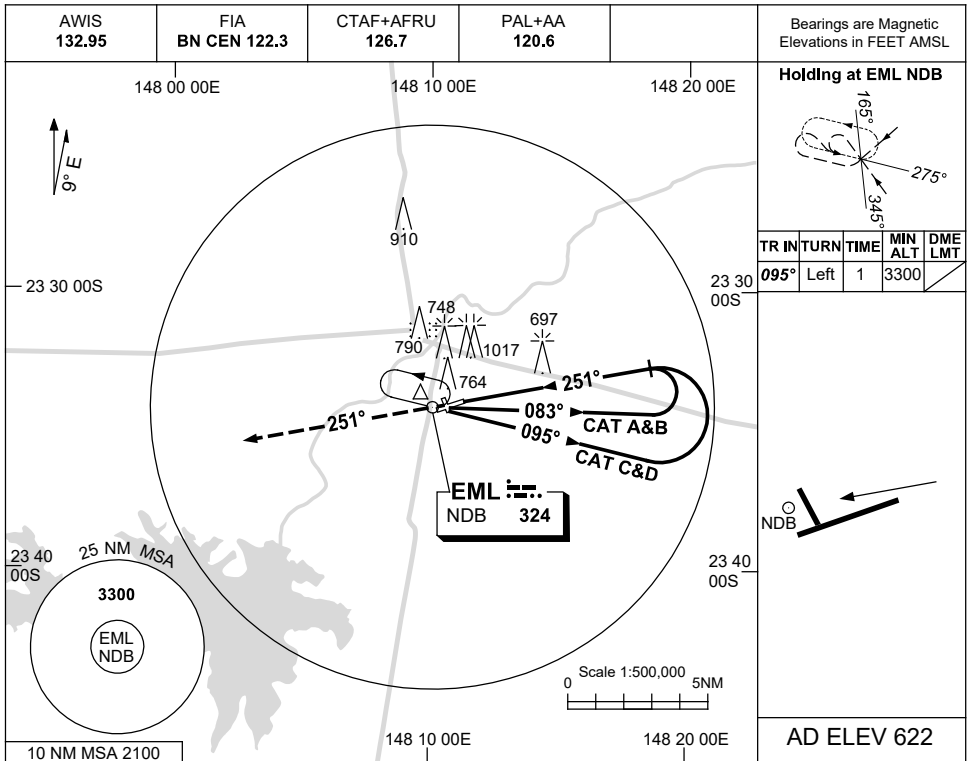

## NOTES

| CATEGORY  | A              | B              | C              | D |
|-----------|----------------|----------------|----------------|---|
| S-I NDB   | 1320 (715-4.1) |                |                |   |
| CIRCLING  | 1420 (798-2.4) | 1520 (898-4.0) | 1520 (898-5.0) |   |
| ALTERNATE | (1298-4.4)     | (1398-6.0)     | (1398-7.0)     |   |

1. MAX IAS:  
INITIAL :  
CAT C&D 210KT.

Changes: PAL+AA.

EMLNB01-171