


19 MAR 2026

AD ELEV 973
33 50 41S 148 38 56E

AERODROME CHART
COWRA, NSW (YCWR)

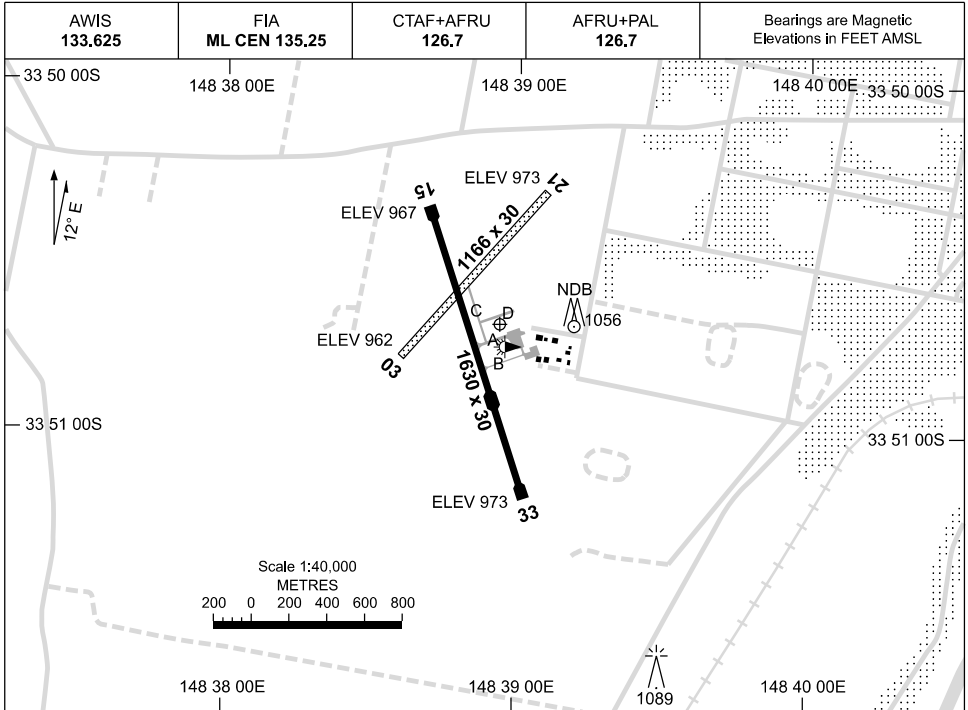

	AERODROME LIGHTING	
RWY	TAXIWAY : BLUE EDGE ON TWY A ONLY RL : AFRU+PAL 126.7	
15 <small>150</small>	LIRL	
<small>330</small> 33	LIRL	
03 <small>029</small>	NIL	
<small>209</small> 21	NIL	

NOTES

1. AWIS RQ ONE ONE-SEC PULSE TO ACTIVATE.


Changes: TWY EDGE LGT, Editorial.

CWRAD01-186

GNSS ARRIVAL PROCEDURES COWRA, NSW (YCWR)


13 JUN 2024


AWIS 133.625	FIA ML CEN 135.25	CTAF+AFRU 126.7	AFRU+PAL 126.7		Bearings are Magnetic Elevations in FEET AMSL
-----------------	----------------------	--------------------	-------------------	--	--



25 NM MSA
5200
CWR NDB

REFERENCE WAYPOINT CWR NDB







2 NM MSA

10 NM MSA 3600

* NO CIRCLING E
OF RWY 15/33
BEYOND 2NM.

AD ELEV 973

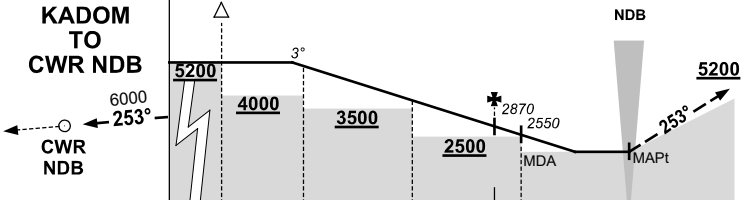KADOM TO CWR NDB	NDB			MISSED APPROACH:															
				TRACK 253°. CLIMB TO 5200FT.															
NM TO CWR NDB	25	15	12	8	5	4	0	0	0	0	0	0	0	0	0	0	0	0	
CIRCLING MINIMA				A,B: 1920-2.4			C: 1920-4.0			D: N/A									
NM TO CWR NDB	12.3	12	11	10	9	8	7	6	5	4	3	2	1	0	0	0	0	0	0
ALT (3° APCH PATH)	5200	5100	4780	4460	4150	3830	3510	3190	2870	2550	2230	1920							

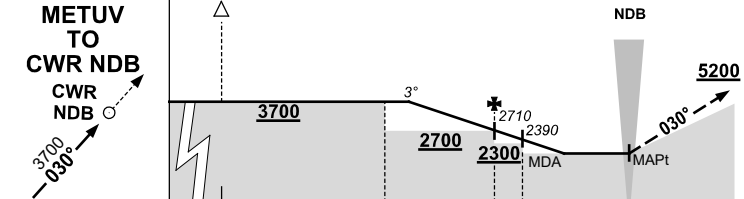
METUV TO CWR NDB	NDB			MISSED APPROACH:															
				TRACK 030°. CLIMB TO 5200FT.															
NM TO CWR NDB	15	9	5	4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CIRCLING MINIMA				A,B: 1850-2.4			C: 1850-4.0			D: N/A									
NM TO CWR NDB	8.1	8	7	6	5	4	3	2.3											
ALT (3° APCH PATH)	3700	3660	3340	3020	2710	2390	2070	1850											

Changes: METUV REPLACES SCAPA.

USE QNH

RNP RWY 15
COWRA, NSW (YCWR)

20 MAR 2025

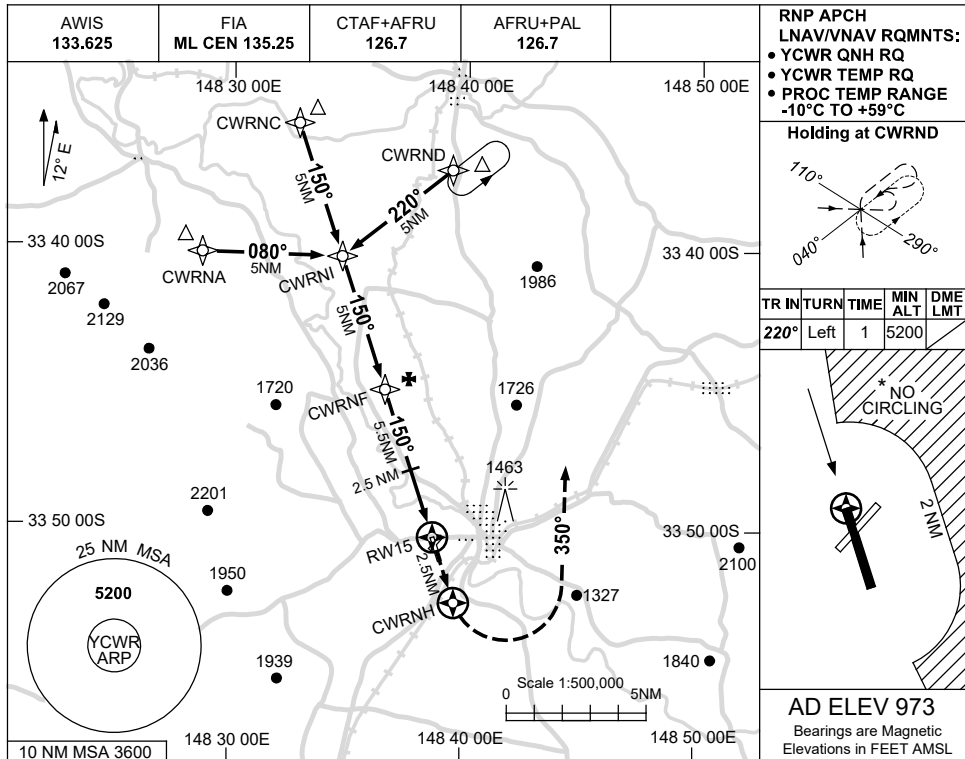


RNP APCH
 LNAV/VNAV RQMNTS:
 • YCWR QNH RQ
 • YCWR TEMP RQ
 • PROC TEMP RANGE -10°C TO +59°C

Holding at CWRND

TR	IN	TURN	TIME	MIN ALT	DME LMT
220°	Left	1		5200	

AD ELEV 973
 Bearings are Magnetic
 Elevations in FEET AMSL

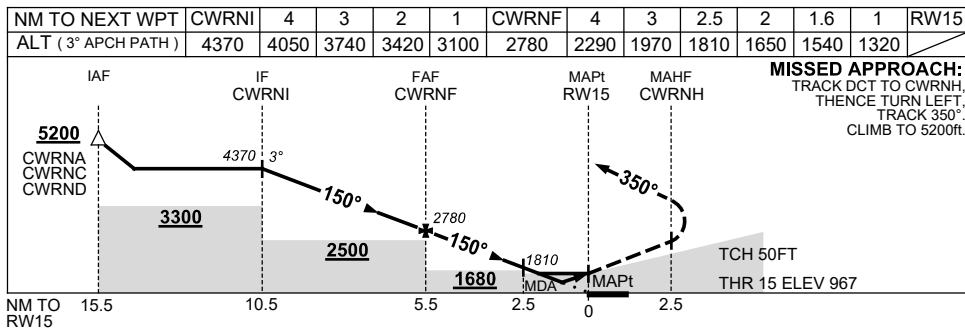

NOTES

CATEGORY	A	B	C	D
LNAV/VNAV		1320 (353-2.0)		NOT APPLICABLE
LNAV		1540 (567-3.2)		
CIRCLING *	1650 (677-2.4)		1810 (837-4.0)	
ALTERNATE		(1177-4.4)	(1337-6.0)	

- MAX IAS: INITIAL : 210KT.
- *2. NO CIRCLING E OF RWY 15/33 BEYOND 2NM.



Changes: LIT OBST, Editorial.

CWRGN01-182

USE QNH

RNP RWY 33
COWRA, NSW (YCWR)

20 MAR 2025

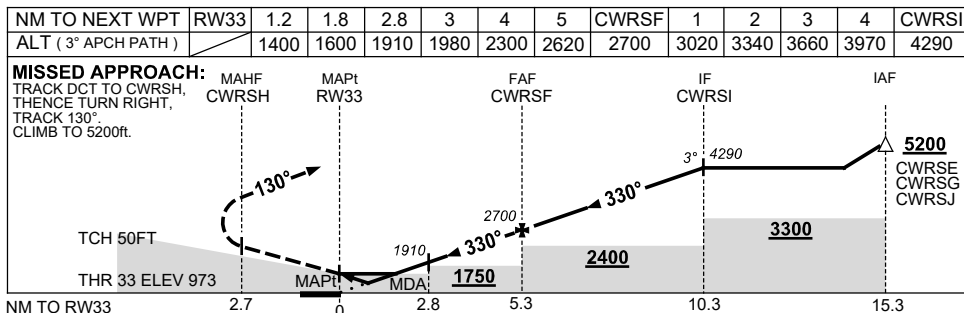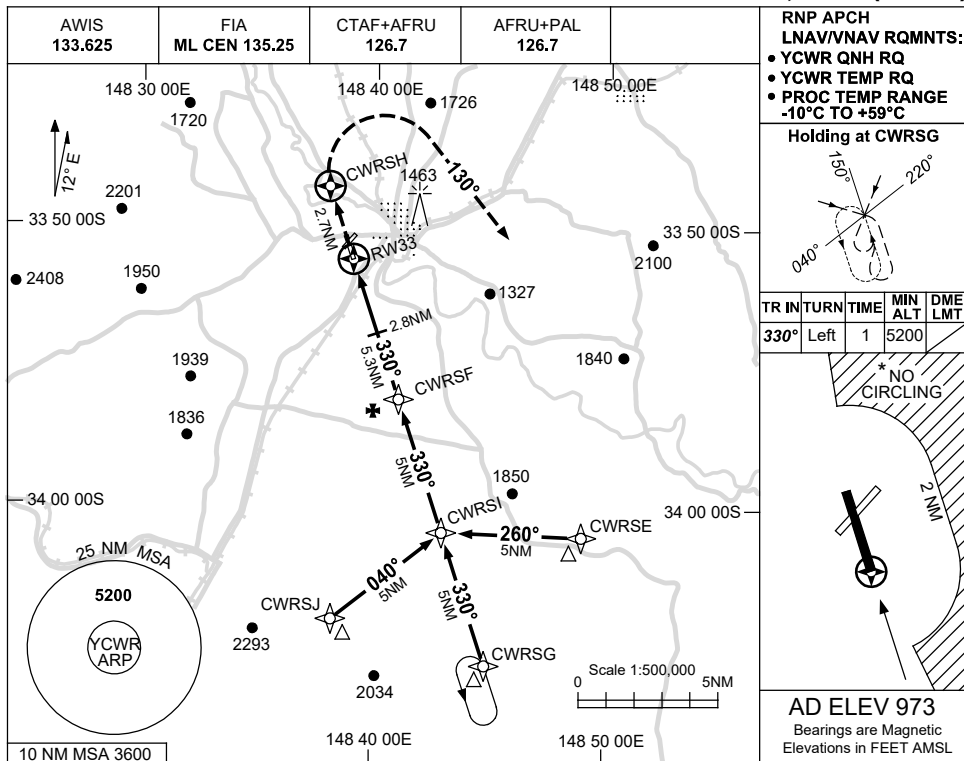

NOTES

CATEGORY	A	B	C	D
LNAV/VNAV		1400 (427-2.4)		NOT APPLICABLE
LNAV		1600 (627-3.6)		
CIRCLING*	1650 (677-2.4)		1810 (837-4.0)	
ALTERNATE	(1177-4.4)		(1337-6.0)	

1. MAX IAS: INITIAL : 210KT.
- *2. NO CIRCLING E OF RWY 15/33 BEYOND 2NM.


Changes: LIT OBST, Editorial.

CWRGN02-182


USE QNH

NDB RWY 15
COWRA, NSW (YCWR)

20 MAR 2025

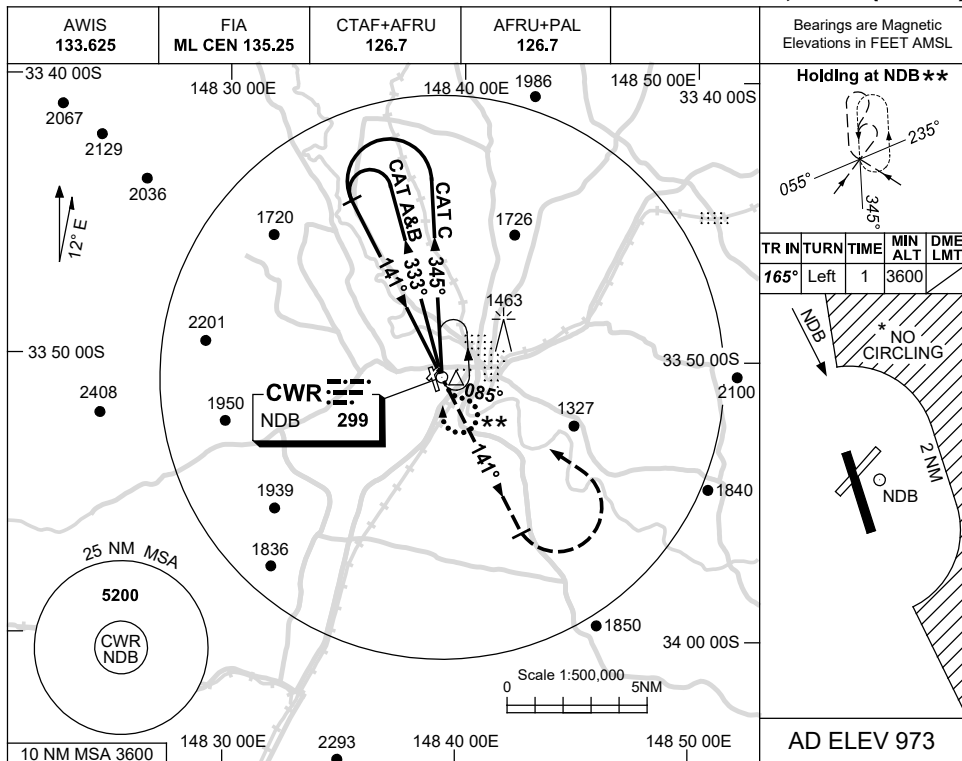

DME DIST	NOT APPLICABLE									
ALT										

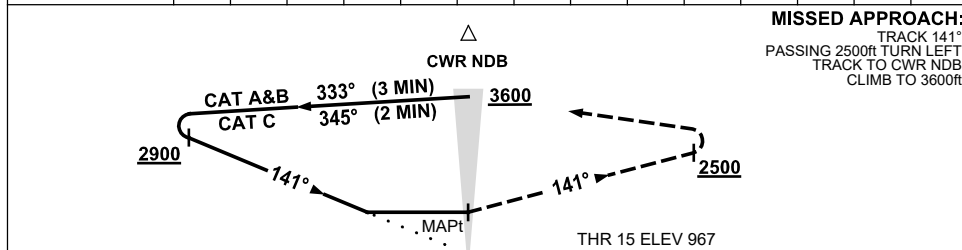

NOTES

1. MAX IAS:
 HOLDING: 210KT.
 INITIAL:
 CAT C 210KT.
- * 2. NO CIRCLING E OF RWY 15/33 BEYOND 2NM.
- ** 3. PROC TURN (80°/260°) RQ TO JOIN PROC FROM HOLD.

CATEGORY	A	B	C	D
S-I NDB	1850 (877-5.0)			NOT APPLICABLE**
CIRCLING *	1850 (877-2.4)	1850 (877-4.0)		
ALTERNATE	(1377-4.4)		(1377-6.0)	

Changes: LIT OBST, Editorial.

CWRNB01-182