

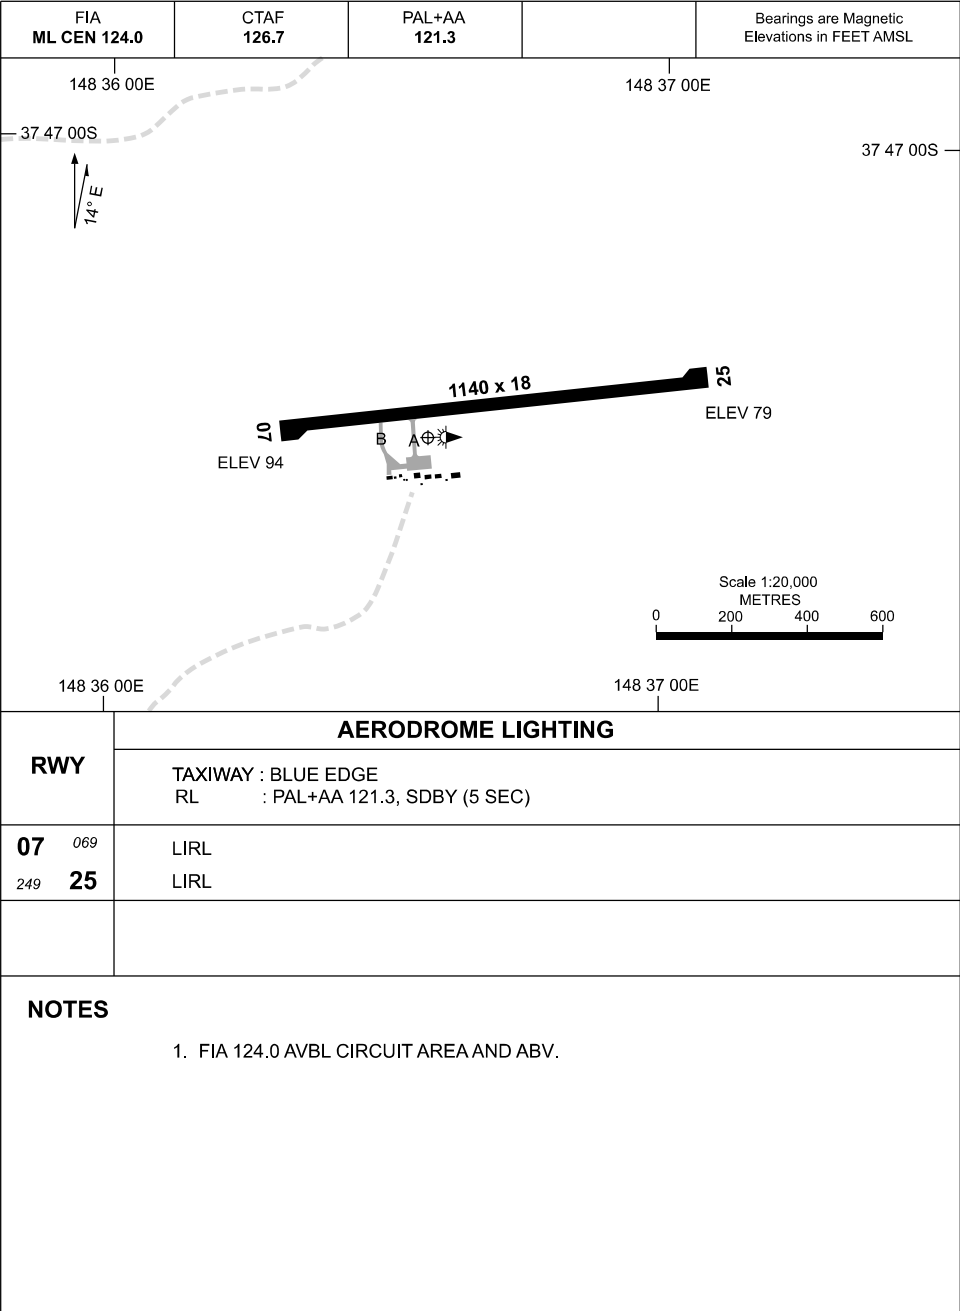


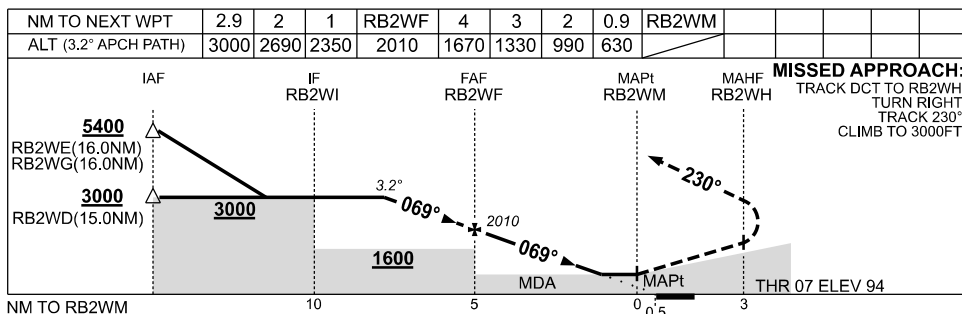

USE QNH

RNP RWY 07
ORBOST, VIC (YORB)

27 NOV 2025

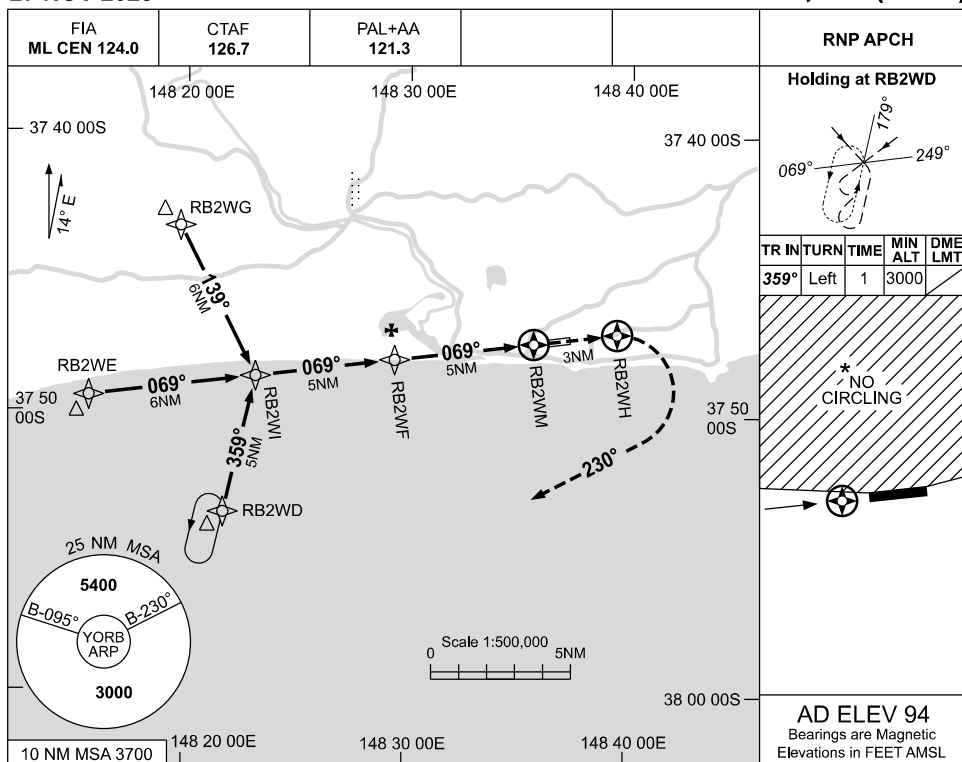

NOTES

CATEGORY	A	B	C	D
LNAV	630 (536-2.9)			NOT APPLICABLE
CIRCLING *	690 (596-2.4)		830 (736-4.0)	
ALTERNATE	(1096-4.4)		(1236-6.0)	

1. MAX IAS:
INITIAL : 210KT.* 2. NO CIRCLING NORTH
OF RWY 07/25.

Changes: MINIMA, MAG VAR, MAGNETIC TRACKS.

ORBG01-185

RNP RWY 25
ORBOST, VIC (YORB)

FIA ML CEN 124.0 **CTAF 126.7** **PAL+AA 121.3**

RNP APCH

Holding at RB2EC

TR IN	TURN	TIME	MIN ALT	DME LMT
319°	Right	1	3000	

AD ELEV 94
Bearings are Magnetic
Elevations in FEET AMSL

NM TO NEXT WPT	RB2EM	1.2	2	3	4	RB2EF	1	2	3	3.5				
ALT (3° APCH PATH)		680	930	1240	1560	1880	2200	2520	2840	3000				

MISSED APPROACH:
 TRACK DCT TO RB2EH,
 TURN LEFT,
 TRACK 090°.
 CLIMB TO 3000FT.

THR 25 ELEV 79

MAPt RB2EH

MAPt RB2EM

FAF RB2EF

IF RB2EI

IAF

5400

RB2EA(16.0NM)

RB2EB(16.0NM)

3000

RB2EC(15.0NM)

1880

1240

249°*

249°

3°

1070

1600

3000

NM TO RB2EM

1. MAX IAS:
INITIAL : 210KT.

* 2. NO CIRCLING NORTH
OF RWY 07/25.

CATEGORY	A	B	C	D
LNAV	680 (601-3.4)			NOT APPLICABLE
CIRCLING *	690 (596-2.4)		830 (736-4.0)	
ALTERNATE	(1096-4.4)		(1236-6.0)	

ORBGN02-185