

BOOLGEEDA**ELEV 1870****AVFAX CODE 6825**

WA

UTC +8

YBGD

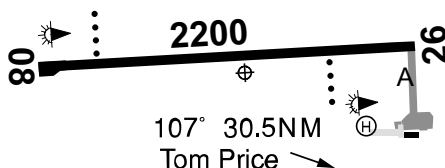
223228S

1171610E

VAR 1 DEG E

CERT

AD OPR Hamersley Iron Pty Ltd, Level 8, 93-95 William St, Perth, WA, 6000. Email: bgdairport@amsaustralia.com. PH AD Manager 08 6213 9002, if not AVBL phone 0448 077 353.

**REMARKS**

Restricted OPS: 24HR PPR from AD OPR (AD Manager).

HANDLING SERVICES AND FACILITIES

VIVA Energy: VIVA Energy Australia Pty Ltd 2200-1000 UTC MON-FRI. AH call-out fee will apply, PN required. PH 0409 897 890. JET A1. VIVA Fuel2Sky Carnet card.

APRONS AND TAXIWAYS

TWY A - Code C, WID 18M, bitumen seal.

AERODROME OBSTACLES

1. Extensive terrain penetrations:
 - a. 2,943FT AMSL PSN BTN BRG 293-045 MAG 2,000-7,000M FM ARP.
 - b. 3,153FT AMSL PSN BTN BRG 075-093 MAG 12,000-16,000M FM ARP.
 - c. 2,494FT AMSL PSN BTN BRG 112-159 MAG 4,000-7,000M FM ARP.
2. Mast LIT 2,100FT AMSL PSN BRG 128 MAG 5,200M FM ARP.
3. MIOL for terrain penetrations of the COS, Inner HZS and APCH SFC:
 - a. 2,953FT AMSL BRG 018 MAG 3.19NM FM ARP 719FT ABV COS.
 - b. 2,693FT AMSL BRG 009 MAG 2.53NM FM ARP 630FT ABV COS.
 - c. 2,552FT AMSL BRG 348 MAG 2.29NM FM ARP 535FT ABV inner HZS.
 - d. 2,470FT AMSL BRG 317 MAG 2.28NM FM ARP 453FT ABV inner HZS.
 - e. 3,162FT AMSL BRG 075 MAG 7.84NM FM ARP 801FT ABV APCH SFC.
 - f. 2,687FT AMSL BRG 081 MAG 7.80NM FM ARP 325FT ABV APCH SFC.
 - g. 2,604FT AMSL BRG 090 MAG 7.48NM FM ARP 243FT ABV APCH SFC.
4. Unlit APN flood LGT:
 - a. 1,944FT AMSL BRG 095 MAG 0.61NM FM ARP. Infringes TNS by 2FT.
 - b. 1,943FT AMSL BRG 095 MAG 0.59NM FM ARP. Infringes TNS by 1FT.

METEOROLOGICAL INFORMATION PROVIDED

1. TAF CAT C, METAR/SPECI.
2. AWIS FREQ 122.475 - Report faults AD OPR.

PHYSICAL CHARACTERISTICS

08/26 084 72a PCN 44 /F /A /1441 (209PSI) /T Sealed WID 45 RWS 300

AERODROME AND APPROACH LIGHTING

RWY 08/26	LIRL	AFRU+PAL 126.7		SDBY PWR AVBL
RWY 08/26	PAPI(1)	AFRU+PAL 126.7	3.0 DEG49FT	SDBY PWR AVBL
RWY 08/26	PTBL(2)			BY PRIOR
				ARRANGEMENT

- (1) Left side.
- (2) EMERG only, 2HR PN.

OTHER LIGHTING

1. SDBY PWR switchover time: 10 SEC.
2. TWY LGT: Blue edge.

ATS AND AERODROME COMMUNICATION FACILITIES

FIA MELBOURNE CENTRE 125.7 CCT area

LOCAL TRAFFIC REGULATIONS

1. All ACFT to use turning nodes, MAX radius turns at MIN speed.
2. All ACFT ABV 5,700KG MTOW must park on marked bays using appropriate lead-in lines.
3. Unlit HEL PRKG AVBL, with marked pad, 200M W of terminal building.
4. HEL to park clear of ring road to allow fuel tanker access.

FLIGHT PROCEDURES

Right hand CCTS only RWY 08.

CTAF - AFRU 126.7

ADDITIONAL INFORMATION

1. Open pit mine blasting within 5NM S and SW of AD SFC - 2,000FT.
2. Caution: YBGD is in close proximity to YEWA (APRX 22NM WNW of YBGD). The APCH/ DEP tracks cross close to the ground.

CHARTS RELATED TO THE AERODROME

1. WAC 3229.
 2. Also refer to AIP Departure and Approach Procedures.
-