

**MOUNT KEITH****ELEV 1792****AVFAX CODE 6605**

WA

UTC +8

YMNE

271711S

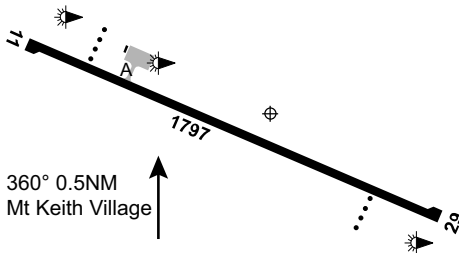
1203317E

VAR 1 DEG E

CERT

AD OPR BHP Billiton, Mount Keith Operations, PO Box 238, Welshpool Delivery Centre, WA, 6986.

PH AD MGR 0429 009 941. Email: david.silvello@bhp.com. ARO 0499 821 780: 08 9037 8748.

**REMARKS**

1. Restricted OPS - PPR.
2. AD charges: ALL ACFT.

**HANDLING SERVICES AND FACILITIES**

BHP. CTC ARO. JET A1 only. Payment method via account or credit card.

**PASSENGER FACILITIES**

LG/RF/WC

**AERODROME OBSTACLES**

1. Unlit terrain 2,024FT AMSL PSN BTN BRG 327-332 MAG 4,453M FM ARP.
2. Unlit terrain 1,998FT AMSL PSN BRG 002 MAG 4,355M FM ARP.
3. Unlit earth bund 8FT AGL PSN BRG 205 MAG 10M FM ARP. Infringes transitional SFC by 1FT.
4. Unlit earth bund 8FT AGL PSN BRG 285 MAG 1,005M FM ARP. Infringes transitional SFC by 3FT.
5. Unlit fence 6FT AGL PSN BRG 115 MAG 20M FM ARP. Infringes transitional SFC by 3FT.

**METEOROLOGICAL INFORMATION PROVIDED**

1. METAR/SPECI.
2. AWIS FREQ 133.15 - Report faults to BHP Nickel West 08 9037 8748.

**PHYSICAL CHARACTERISTICS**

11/29 113 59a PCN 24 /F /A /1000 (145PSI) /T WID 30 RWS 150

**AERODROME AND APPROACH LIGHTING**

RWY 11/29 LIRL(1) SDBY PWR AVBL

RWY 11/29 PAPI(2) 3.0 DEG42FT SDBY PWR AVBL

(1) HN

(2) Left side. Activated H24.

**OTHER LIGHTING**

1. Secondary PWR switchover time: 15 SEC.
2. TWY LGT: Blue edge.
3. TWY holding point LGT: 2 x orange.

**ATS AND AERODROME COMMUNICATION FACILITIES**

FIA MELBOURNE CENTRE 118.95 On Ground

UNICOM MOUNT KEITH UNICOM 126.5

**LOCAL TRAFFIC REGULATIONS**

1. 180 DEG turns at RWY ends only. MAX RAD MNM speed.
2. ACFT must be at taxiing speed when turning into and out of TWY/RWY.
3. ACFT ABV 5,700KG must taxi off RWY CL and roll past TWY/RWY INT until taxiing speed achieved. ACFT must follow lead in lines.
4. BAE 146/RJ ACFT to use F70 lead in line.
5. Q400 ACFT to use F100 lead in taxi line on APN.

**FLIGHT PROCEDURES**

Right hand CCTS required when OPR RWY 11.

**CTAF - AFRU 126.5**

AFRU not AVBL on the ground, seek CTAF confirmation FM YMNE UNICOM OPR.

**ADDITIONAL INFORMATION**

Blasting HJ:

- a. BRG 348 DEG MAG 3.4NM FM ARP. SFC to 2,000FT AGL. CTC ARO for blasting times.
- b. BRG 170 DEG MAG 9.1NM FM ARP. SFC to 2,000FT AGL. CTC ARO for blasting times.

**CHARTS RELATED TO THE AERODROME**

1. WAC 3345.
  2. Also refer to AIP Departure and Approach Procedures.
-