


21 MAR 2024

AD ELEV 471
33 41 04S 121 49 22E

AERODROME CHART
ESPERANCE, WA (YESP)

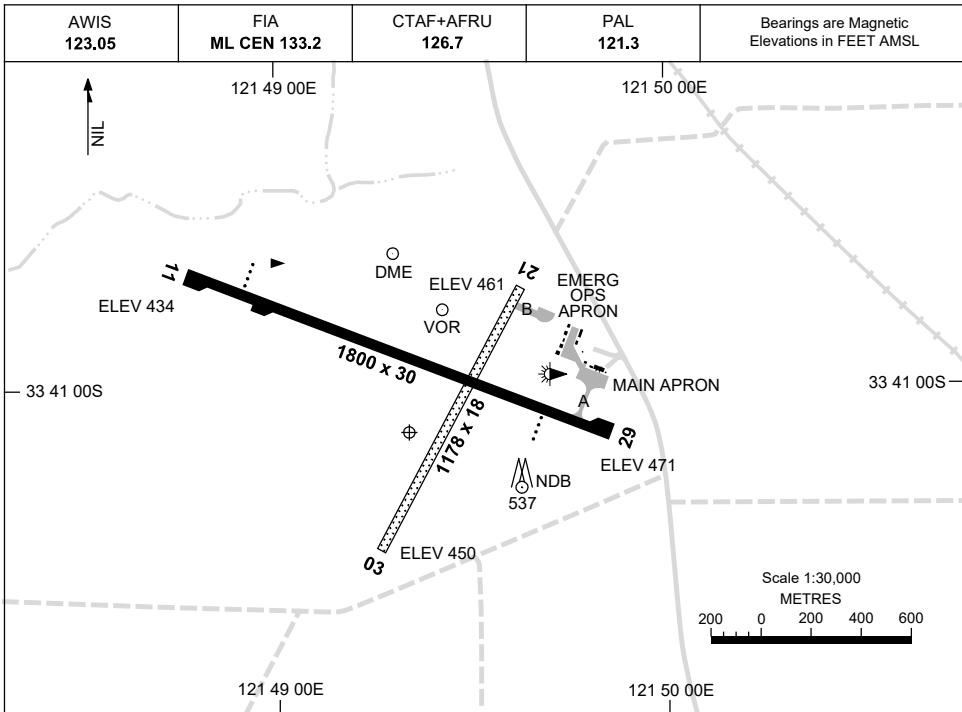

	AERODROME LIGHTING
RWY	TAXIWAY : BLUE EDGE RL : PAL 121.3 , SDBY (10 SEC)
11 ¹¹⁰ 290 29	PAPI 3.0° 51FT LIRL PAPI 3.0° 45FT LIRL
03 ⁰²⁸ 208 21	NIL NIL

NOTES

Changes: MAG VAR, Editorial.


ESPAD01-178

DME or GNSS ARRIVAL PROCEDURES ESPERANCE, WA (YESP)

2 DEC 2021


AWIS 123.05	FIA ML CEN 133.2	CTAF+AFRU 126.7	PAL 121.3		Bearings are Magnetic Elevations in FEET AMSL
----------------	---------------------	--------------------	--------------	--	--

25 NM MSA



10 NM MSA 2000

**DME USING ESP DME
REFERENCE WAYPOINT ESP VOR**



AD ELEV 471



ALL ROUTES TO ESP VOR or NDB	25	15	10	5	4	0	MISSED APPROACH: CLIMB ON TRACK TO 2300FT.
	CIRCLING MINIMA		A,B: 1350-2.4		C: 1350-4.0		
NM TO ESP VOR	6.5	6	5	4	3.5		
ALT (3° APCH PATH)	2300	2130	1820	1500	1350		

USE QNH


RNP RWY 11

ESPERANCE, WA (YESP)

21 MAR 2024

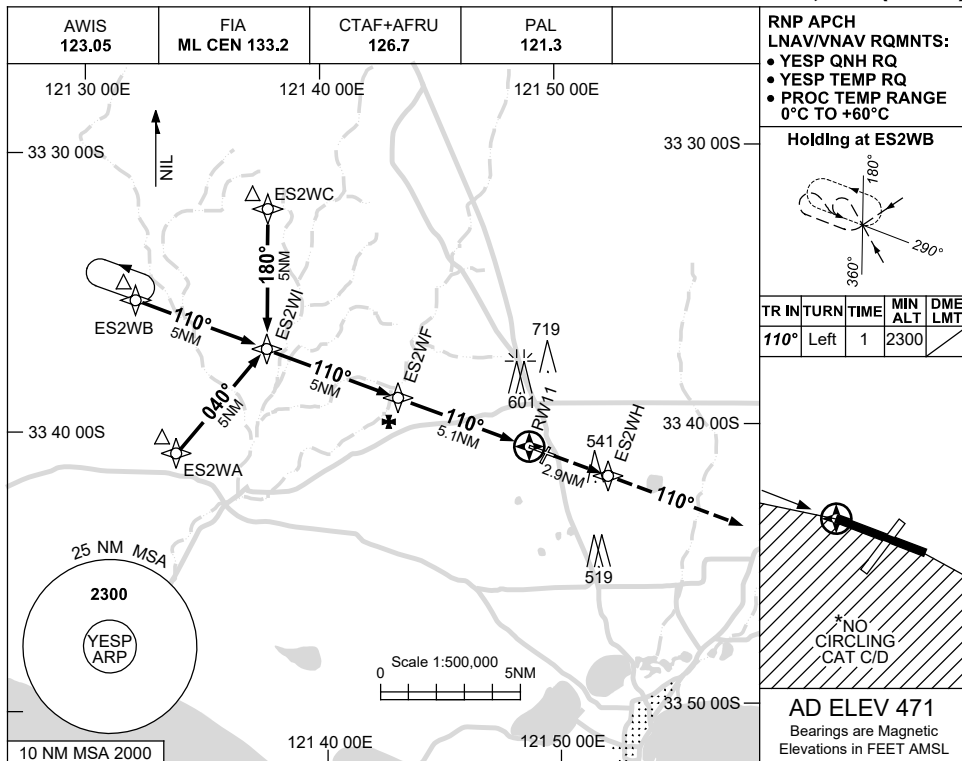


TR	IN	TURN	TIME	MIN ALT	DME LMT
110°	Left	1	2300		



AD ELEV 471
Bearings are Magnetic
Elevations in FEET AMSL

NM TO NEXT WPT	0.6	ES2WF	4	3	2	1.6	1	RW11				
ALT (3° APCH PATH)	2300	2110	1760	1440	1120	990	810					

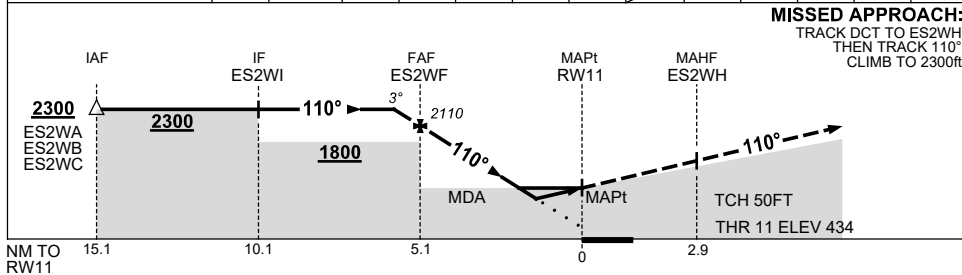

MISSED APPROACH:
TRACK DCT TO ES2WH,
THEN TRACK 110°.
CLIMB TO 2300ft.

NOTES

CATEGORY	A	B	C	D
LNAV/VNAV		810 (376-2.1)		
LNAV		990 (556-3.2)		
CIRCLING*	1120 (649-2.4)		1230 (759-4.0)	1260 (789-5.0)
ALTERNATE	(1149-4.4)		(1259-6.0)	(1289-7.0)

- MAX IAS: INITIAL : 210KT.
- NO CIRCLING CAT C/D STH OF RWY 11/29.


Changes: CAT C CIRCLING, MAG VAR, Editorial.

ESPGN01-178

USE QNH

RNP RWY 29
ESPERANCE, WA (YESP)

21 MAR 2024

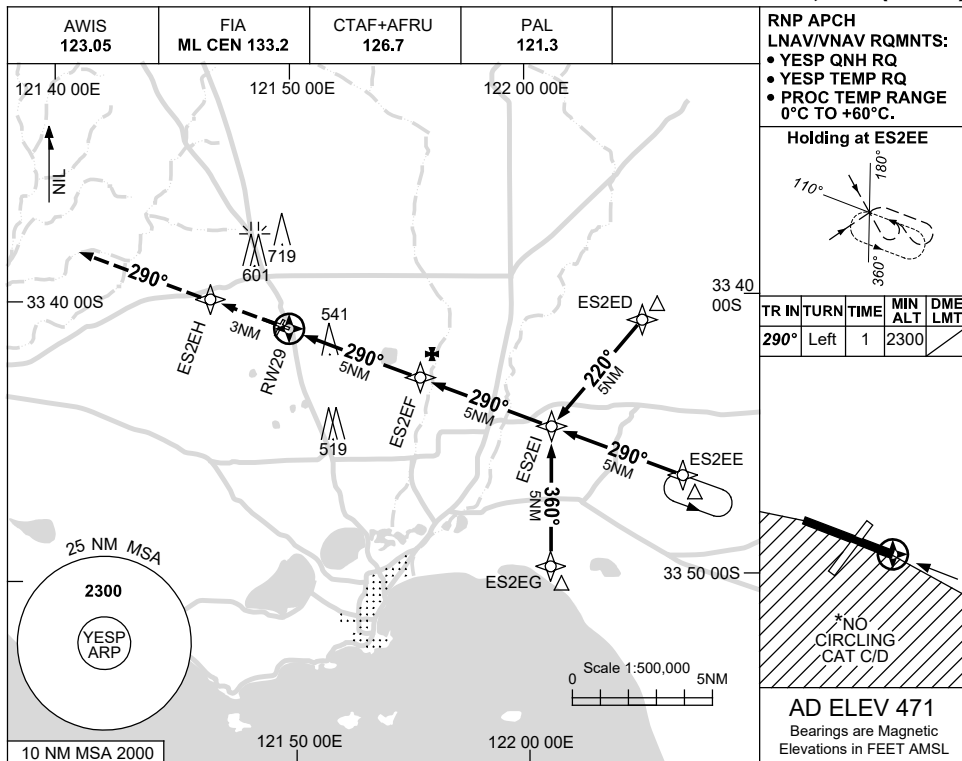

RNP APCH
 LNAV/VNAV RQMTS:
 • YESP QNH RQ
 • YESP TEMP RQ
 • PROC TEMP RANGE 0°C TO +60°C.


Holding at ES2EE

TR IN	TURN	TIME	MIN ALT	DME LMT
290°	Left	1	2300	

*NO CIRCLING CAT C/D

AD ELEV 471
 Bearings are Magnetic
 Elevations in FEET AMSL

NM TO NEXT WPT	RW29	0.9	1.5	2	3	4	ES2EF	0.6				
ALT (3° APCH PATH)		810	990	1160	1480	1790	2110	2300				

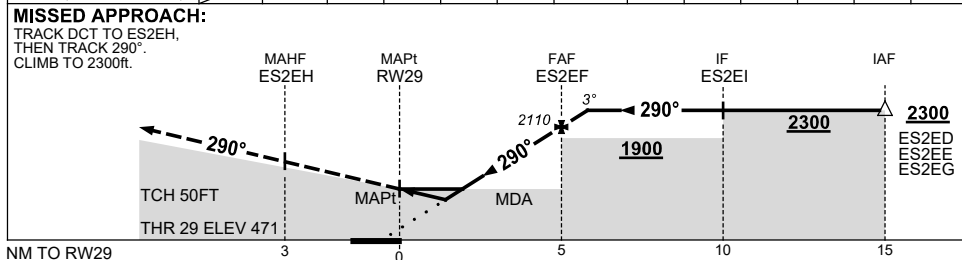

NOTES

CATEGORY	A	B	C	D
LNAV/VNAV		810 (339-1.9)		
LNAV		990 (519-2.9)		
CIRCLING*	1120 (649-2.4)		1230 (759-4.0)	1260 (789-5.0)
ALTERNATE	(1149-4.4)		(1259-6.0)	(1289-7.0)

- MAX IAS:
INITIAL : 210KT.
- *2. NO CIRCLING CAT C/D
STH OF RWY 11/29.

Changes: CAT C CIRCLING, MAG VAR, Editorial.


ESPGN02-178




USE QNH

NDB RWY 11
ESPERANCE, WA (YESP)

21 MAR 2024

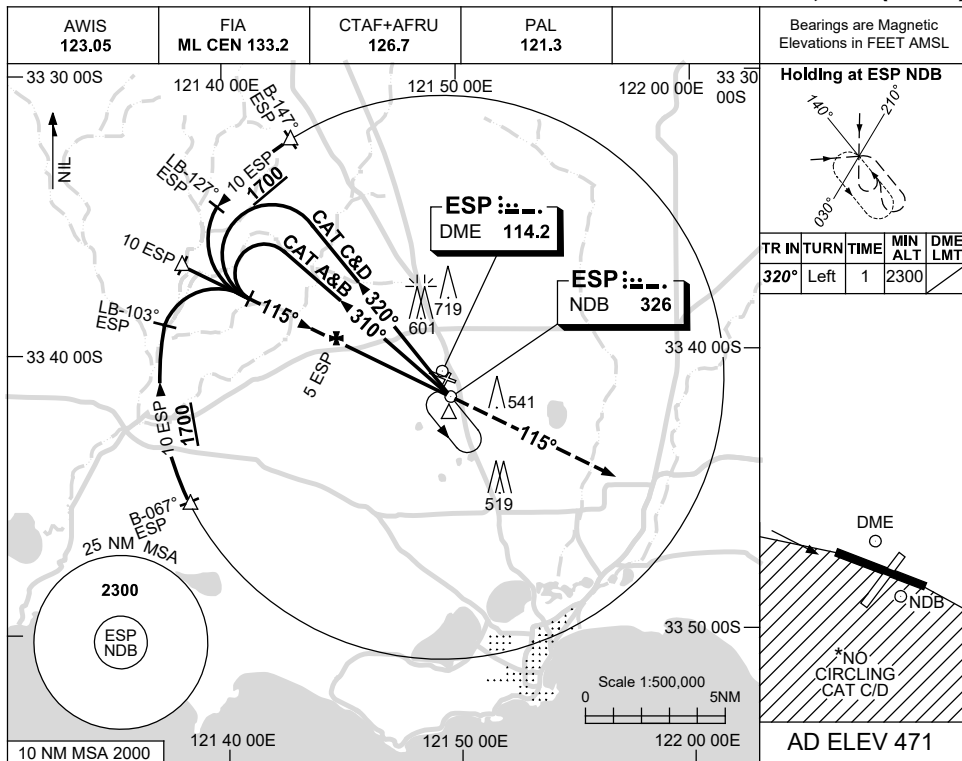

DIST BY DME	6.2	6	5	4	3	2				
ALT (3° APCH PATH)	2300	2250	1930	1610	1300	990				

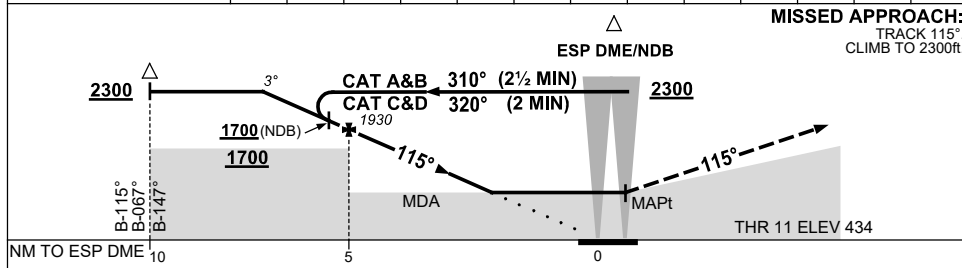

NOTES

CATEGORY	A	B	C	D
S-I NDB		1040 (606-3.4)		
S-I NDB/DME		990 (556-3.1)		
CIRCLING *	1120 (649-2.4)		1230 (759-4.0)	1260 (789-5.0)
ALTERNATE	(1149-4.4)		(1259-6.0) (1289-7.0)	

1. MAX IAS:
INITIAL : 210KT.
- * 2. NO CIRCLING CAT C/D
STH OF RWY 11/29.

Changes: CAT C CIRCLING, MAG VAR, Editorial.


ESPNB01- 178

USE QNH

NDB RWY 29

21 MAR 2024


ESPERANCE, WA (YESP)

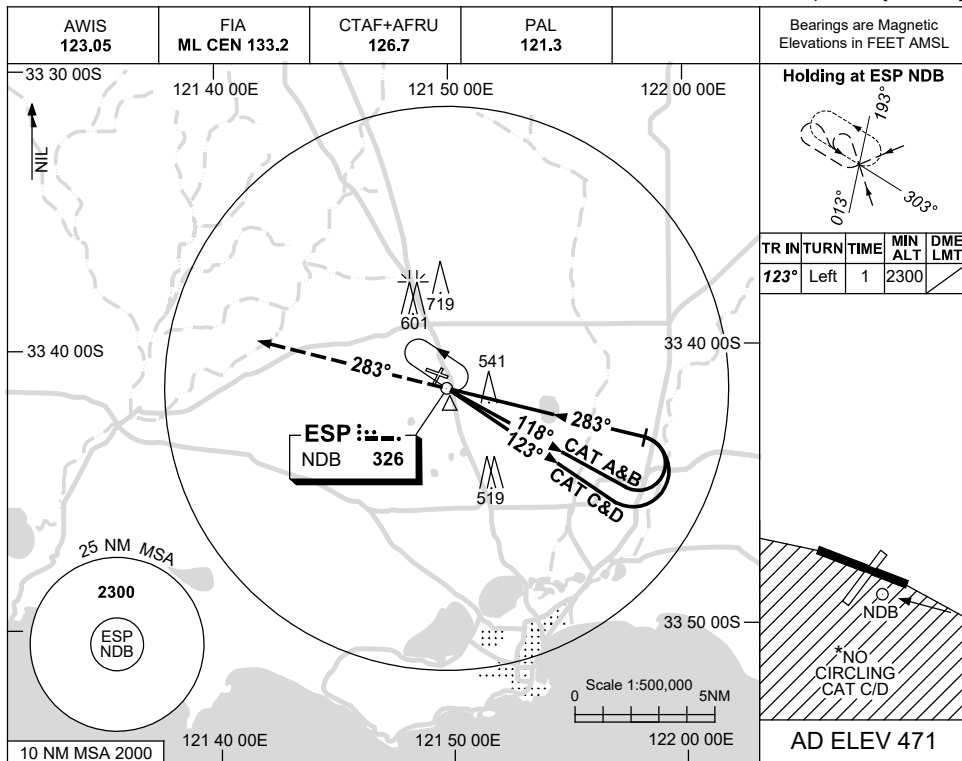

DME DIST	NOT APPLICABLE			
ALT				

MISSED APPROACH:

TRACK 283°.
CLIMB TO 2300ft.

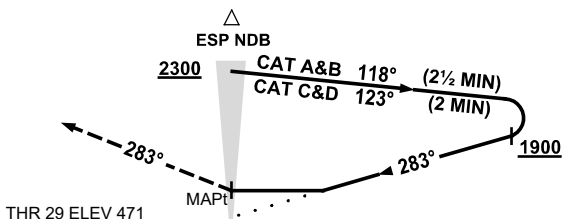

NOTES

CATEGORY	A	B	C	D
S-I NDB	1040 (569-3.2)			
CIRCLING*	1120 (649-2.4)	1230 (759-4.0)	1260 (789-5.0)	
ALTERNATE	(1149-4.4)	(1259-6.0)	(1289-7.0)	

1. MAX IAS:
INITIAL : 180KT.
- * 2. NO CIRCLING CAT C/D
STH OF RWY 11/29.


Changes: CAT C CIRCLING, MAG VAR, Editorial.

ESPNB02-178


USE QNH

VOR RWY 11
ESPERANCE, WA (YESP)

21 MAR 2024

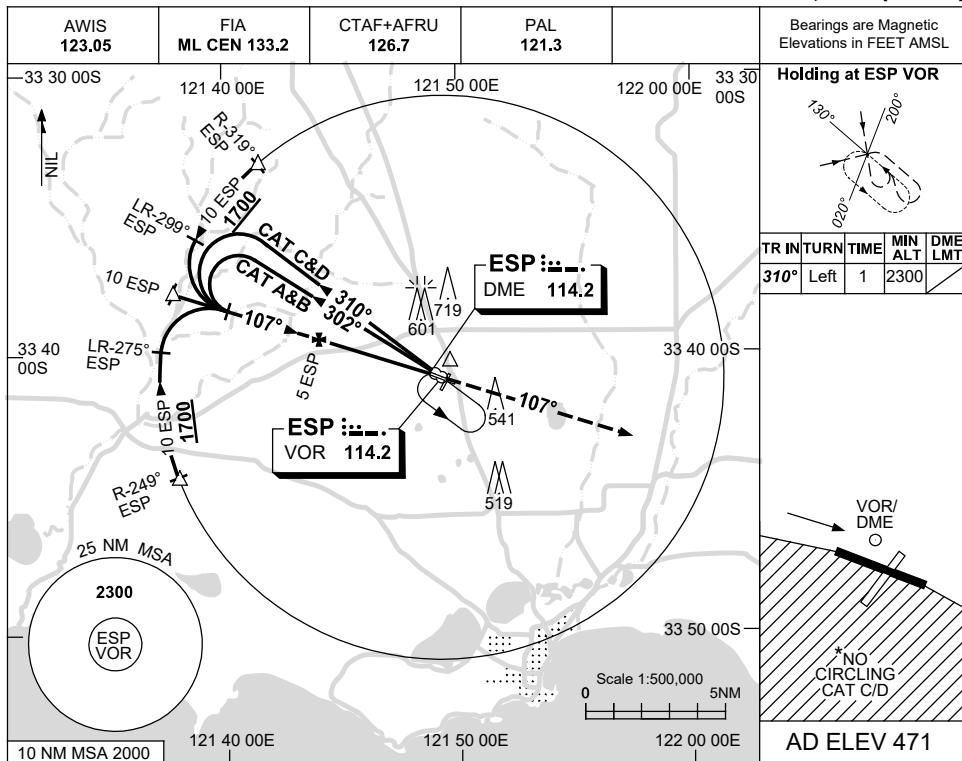

DIST BY DME	6.2	6	5	4	3	2				
ALT (3° APCH PATH)	2300	2250	1930	1610	1300	990				

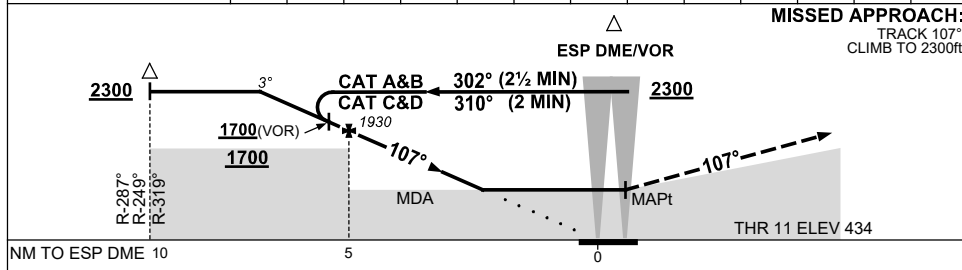

NOTES

CATEGORY	A	B	C	D
S-I VOR		1040 (606-3.4)		
S-I VOR/DME		990 (556-3.1)		
CIRCLING*	1120 (649-2.4)		1230 (759-4.0)	1260 (789-5.0)
ALTERNATE	(1149-4.4)		(1259-6.0)	(1289-7.0)

- MAX IAS: INITIAL : 210KT.
- *2. NO CIRCLING CAT C/D STH OF RWY 11/29.

Changes: CAT C CIRCLING, MAG VAR, Editorial.


ESPVO01-178

USE QNH

VOR RWY 29


21 MAR 2024

ESPERANCE, WA (YESP)

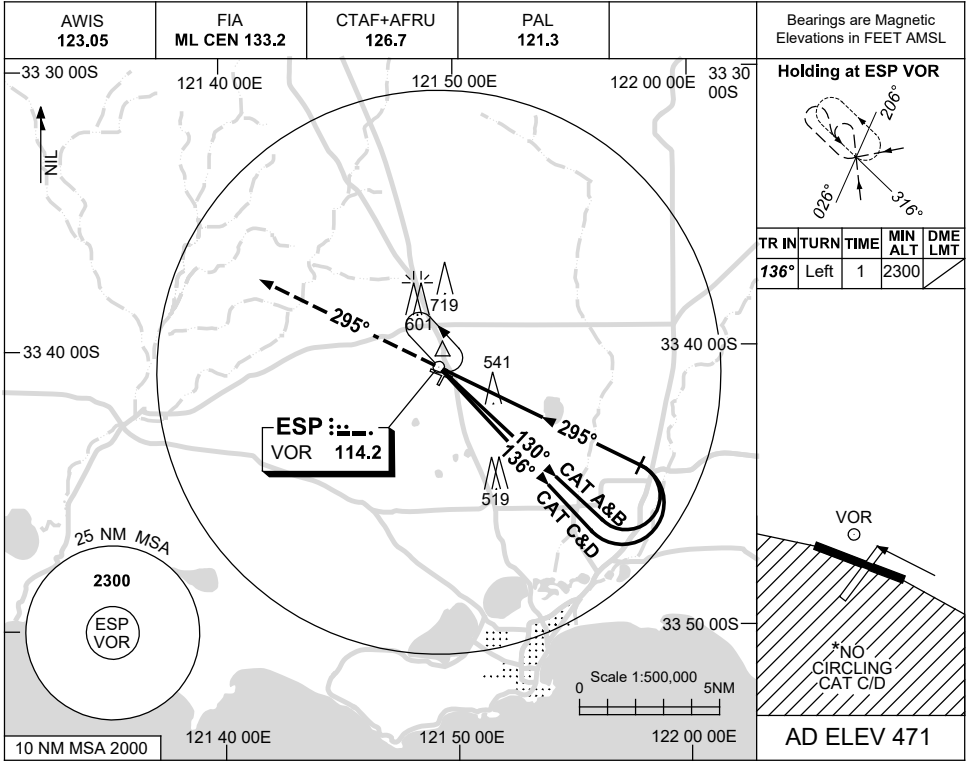

DME DIST														NOT APPLICABLE					
ALT																			

MISSED APPROACH:
TRACK 295°
CLIMB TO 2300ft.

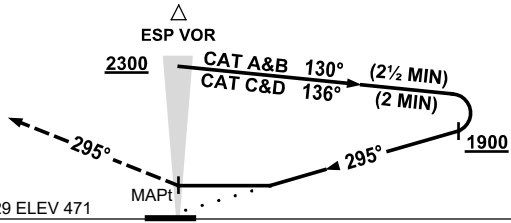

NOTES

CATEGORY	A	B	C	D
S-I VOR	1040 (569-3.2)			
CIRCLING*	1120 (649-2.4)	1230 (759-4.0)	1260 (789-5.0)	
ALTERNATE	(1149-4.4)		(1259-6.0)	
	(1289-7.0)			

1. MAX IAS:
INITIAL : 180KT.
- * 2. NO CIRCLING CAT C/D
STH OF RWY 11/29.

Changes: CAT C CIRCLING, MAG VAR, Editorial.

ESPVO02-178