



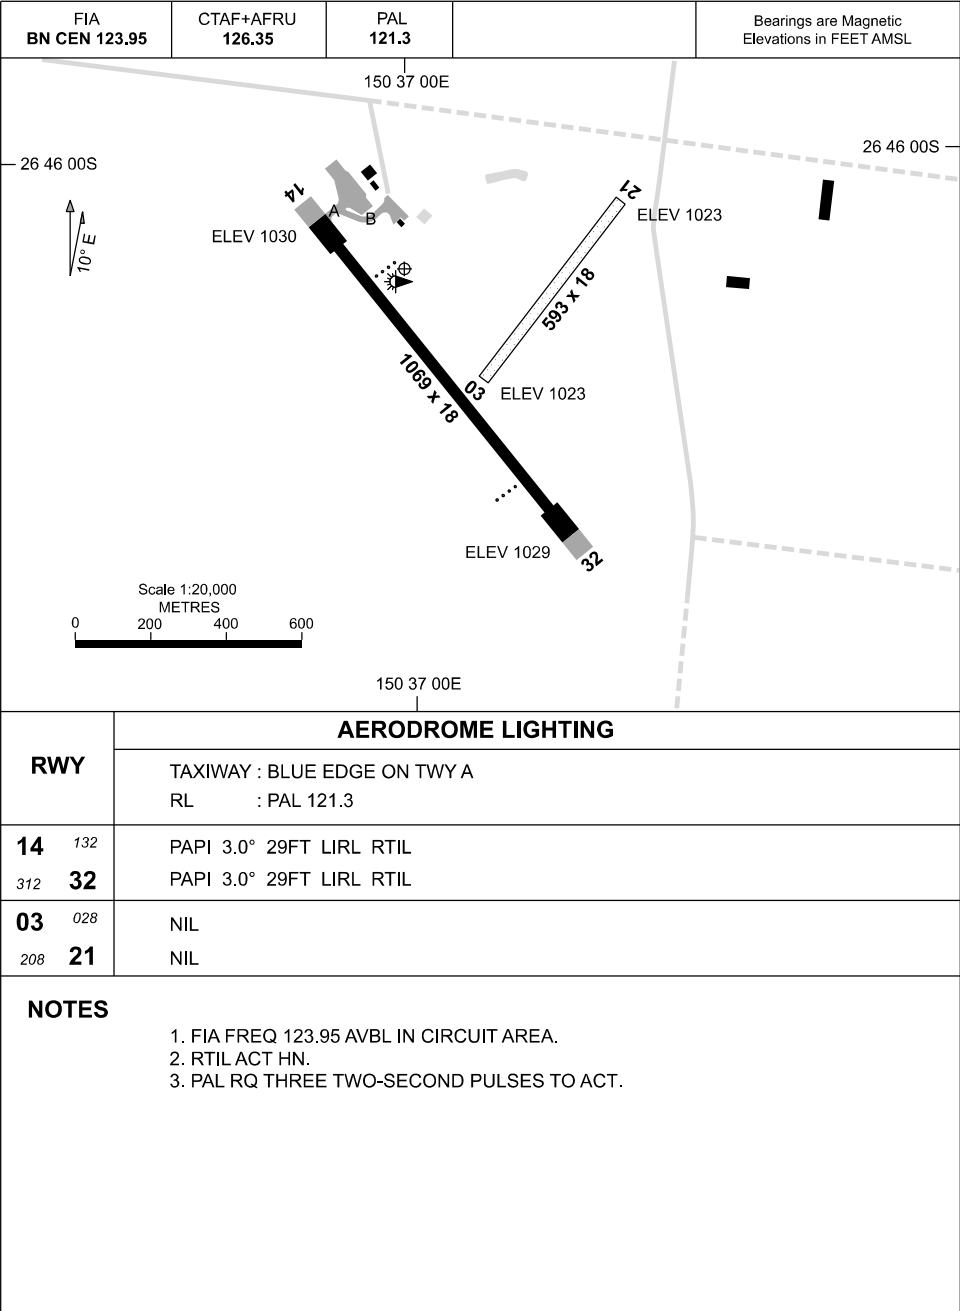


USE QNH

RNP RWY 14

27 NOV 2025

CHINCHILLA, QLD (YCCA)

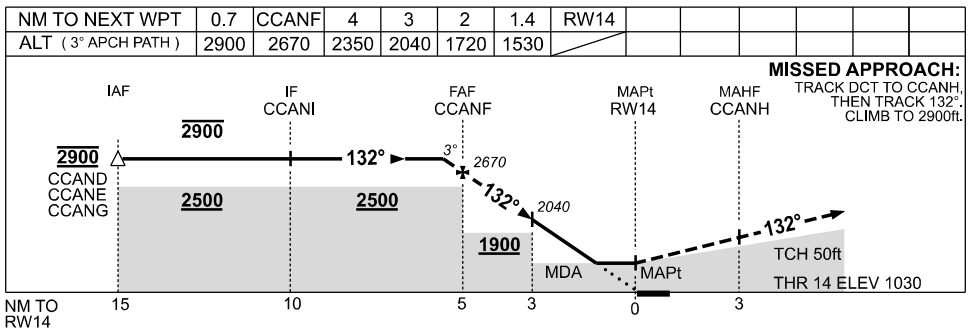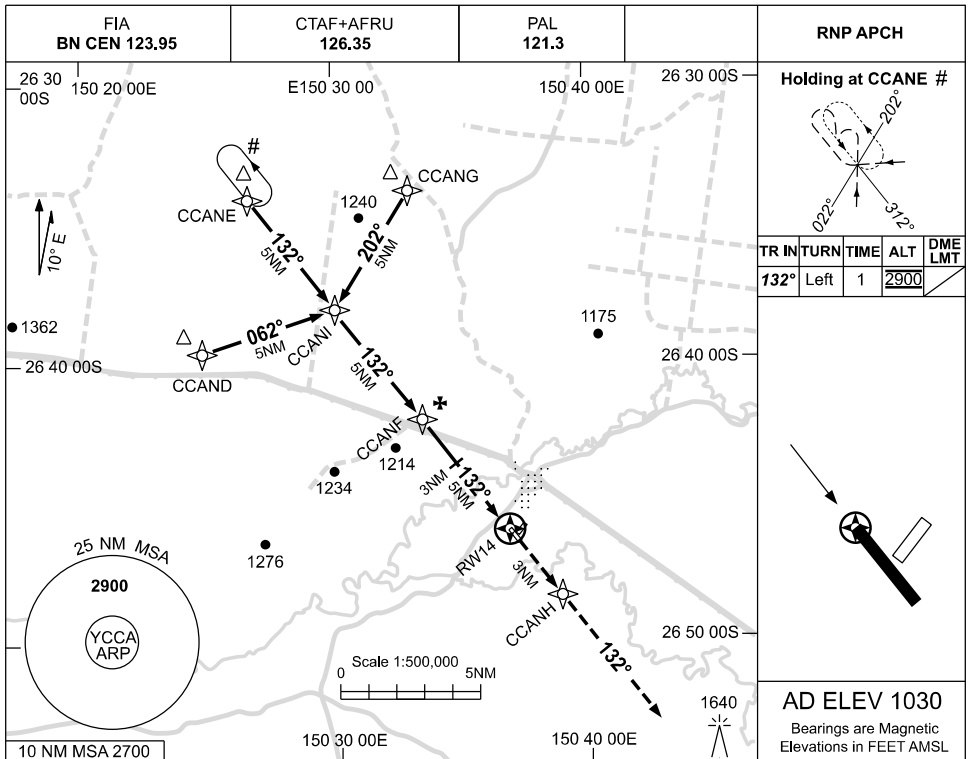

NOTES

CATEGORY	A	B	C	D
LNAV	1530 (500-2.8)			NOT APPLICABLE
CIRCLING	1630 (600-2.4)		1810 (780-4.0)	
ALTERNATE	(1100-4.4)		(1280-6.0)	

- MAX IAS:
INITIAL : 210KT.
- PROC OVERLAID BY
YMLS RNP RWY 22
HOLDING PATTERN AND
INITIAL SEGMENTS.
PRESCRIBED ALTITUDES
ENSURE SEPARATION.

Changes: LNAV/VNAV REMOVED, Editorial.

CCAGN01-185

RNP RWY 32
CHINCHILLA, QLD (YCCA)

FIA BN CEN 123.95

CTAF+AFRU 126.35

PAL 121.3

RNP APCH

Holding at CCASB


TR IN	TURN	TIME	MIN ALT	DME LMT
312°	Left	1	2900	

AD ELEV 1030

Bearings are Magnetic
Elevations in FEET AMSL

NM TO NEXT WPT	RW32	1.4	2	3	4	CCASF	0.7							
ALT (3° APCH PATH)		1530	1720	2040	2350	2670	2900							

TRACK DCT TO CCASH,
THEN TRACK 312°.
CLIMB TO 2900ft.

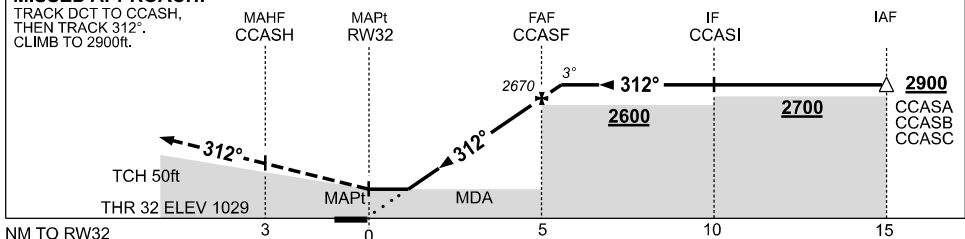

CATEGORY	A	B	C	D
LNAV	1530 (500-2.8)			NOT APPLICABLE
CIRCLING	1630 (600-2.4)		1810 (780-4.0)	
ALTERNATE	(1100-4.4)		(1280-6.0)	

Changes: LNAV/VNAV REMOVED, Editorial.

CCAGN02-185