



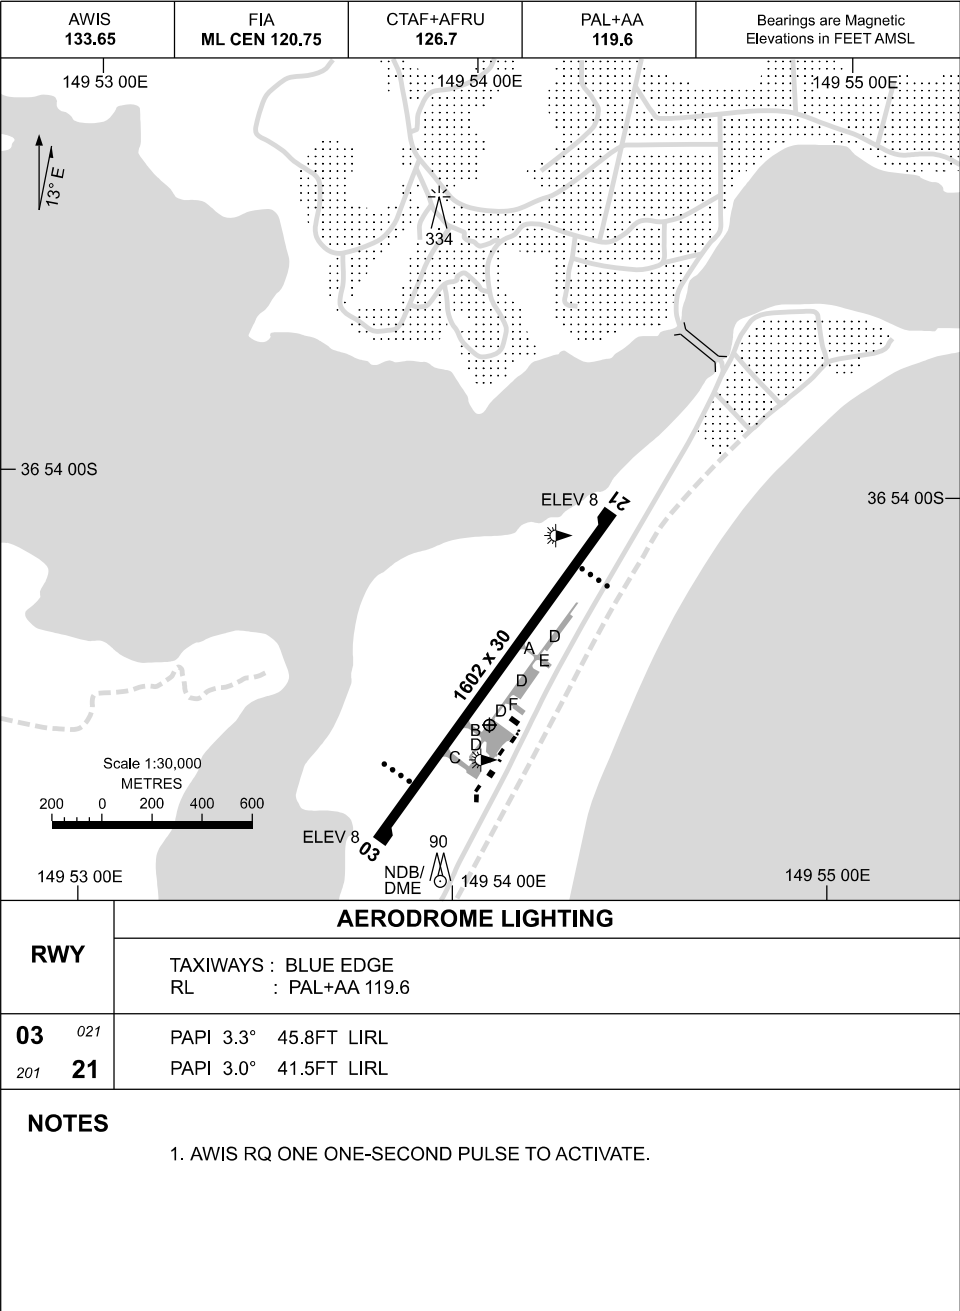


DME or GNSS ARRIVAL PROCEDURES
MERIMBULA, NSW (YMER)

27 NOV 2025

AWIS 133.65	FIA ML CEN 120.75	CTAF+AFRU 126.7	PAL+AA 119.6		Bearings are Magnetic. Elevations in FEET AMSL
----------------	----------------------	--------------------	-----------------	--	---




**DME USING MER DME
REFERENCE WAYPOINT MER NDB**



10 NM MSA 4200

AD ELEV 8

**ALL ROUTES
TO
MER NDB**

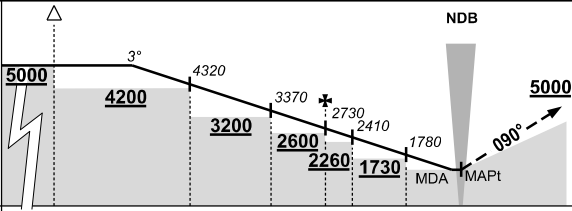

NM TO MER NDB 25 15 10 7 5 4 2 0

CIRCLING MINIMA				A,B: 1240-2.4		C: 1290-4.0		D: N/A							
NM TO MER NDB	12.1	12	11	10	9	8	7	6	5	4	3	2	1	0.3	
ALT (3° APCH PATH)	5000	4960	4640	4320	4010	3690	3370	3050	2730	2410	2100	1780	1460	1240	

MISSED APPROACH:

TURN AS APPROPRIATE, TRACK 090°. CLIMB TO 5000ft.



NOTE:
1. MAX IAS: MISSED APCH TURN 230KT.

USE QNH

RNP RWY 03

27 NOV 2025

MERIMBULA, NSW (YMER)

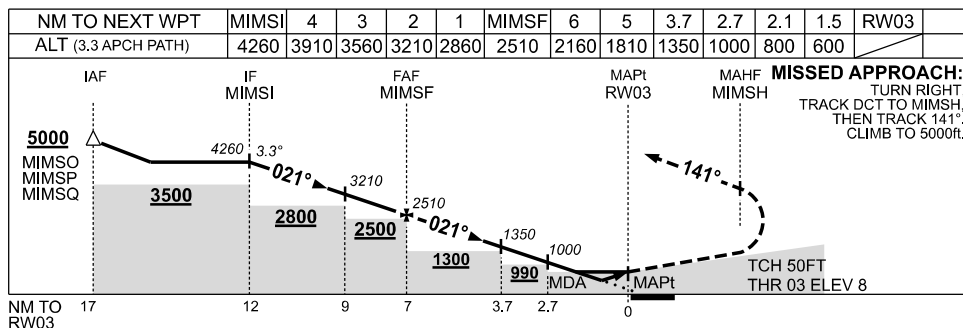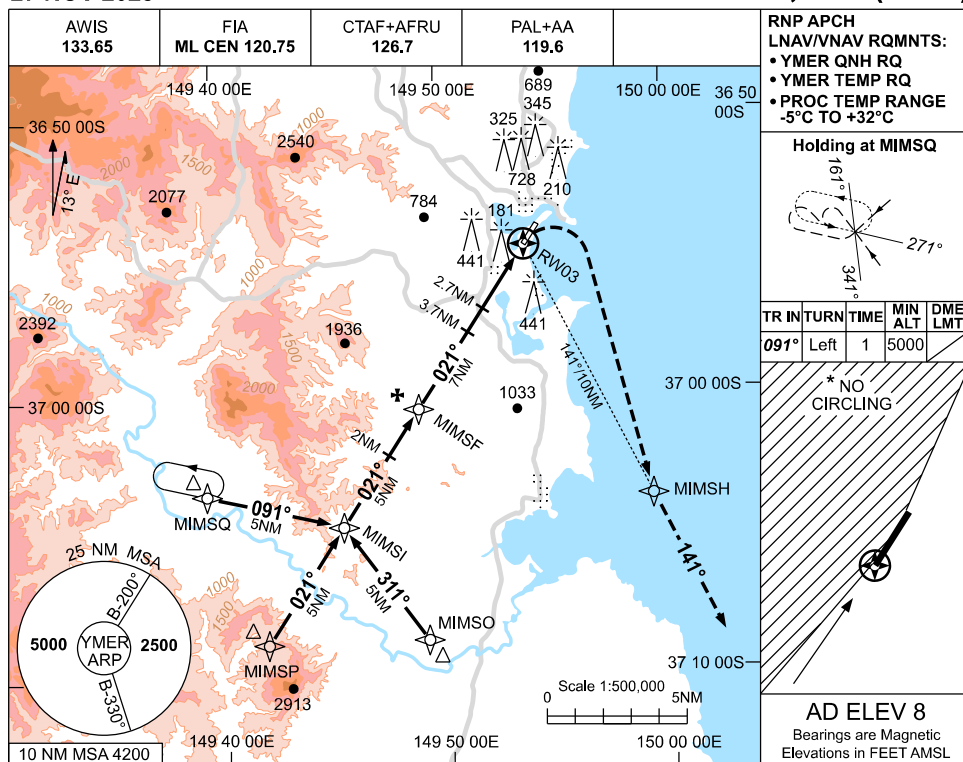

NOTES

1. MAX IAS:
INITIAL : 210KT.
- * 2. NO CIRCLING
WEST OF RWY 03 / 21.
3. COLOUR: SEE
SPEC NOTICES.

CATEGORY	A	B	C	D
LNAV/VNAV	600 (592-3.1)			NOT APPLICABLE
LNAV	800 (792-4.1)			
CIRCLING *	1140 (1132-2.4)		1290 (1282-4.0)	
ALTERNATE	(1632-4.4)		(1782-6.0)	

Changes: CAT C CIRCLING MINIMA.



MERGN01-185

USE QNH

RNP RWY 21

27 NOV 2025

MERIMBULA, NSW (YMER)

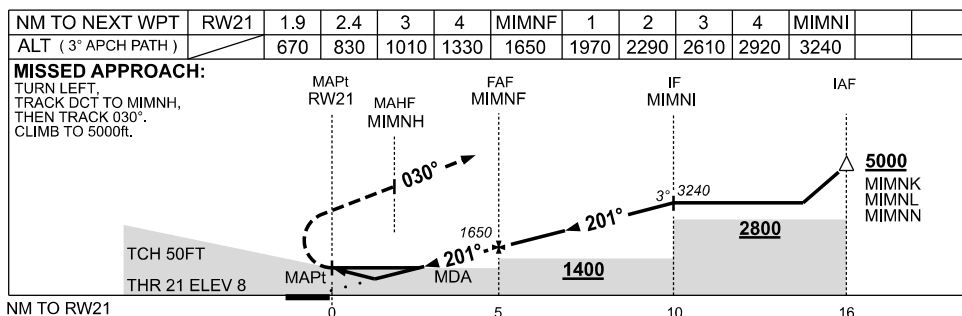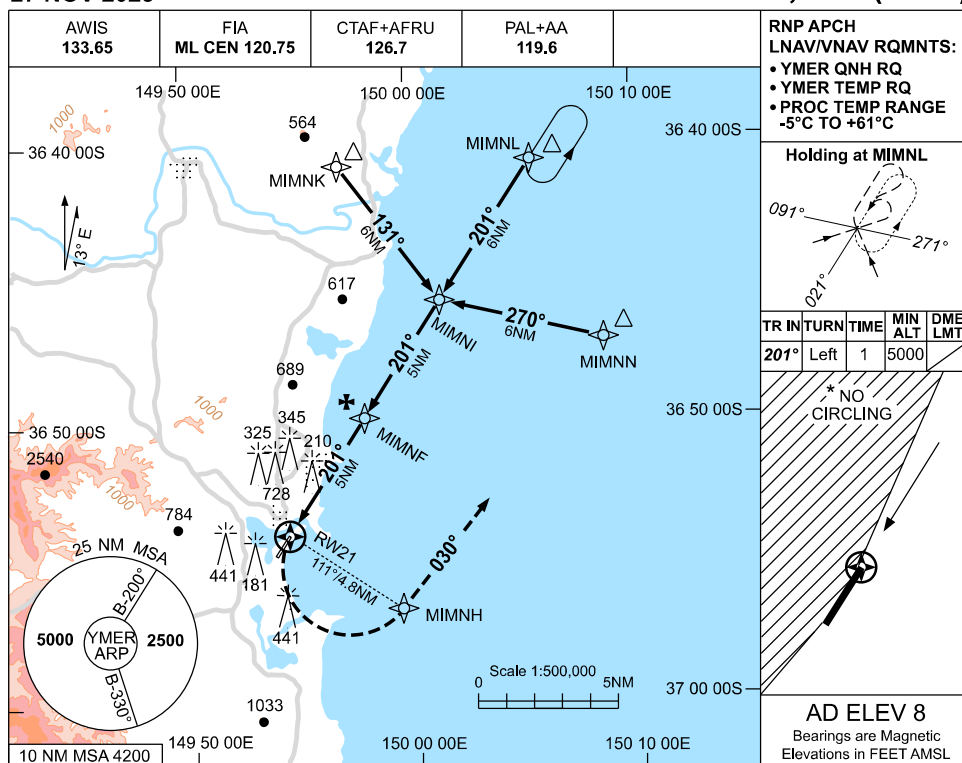

NOTES

CATEGORY	A	B	C	D
LNAV/VNAV	670 (662-3.8)			NOT APPLICABLE
LNAV	830 (822-4.7)			
CIRCLING *	1140 (1132-2.4)		1290(1282-4.0)	
ALTERNATE	(1632-4.4)		(1782-6.0)	

- MAX IAS:
INITIAL : 210KT.
- NO CIRCLING
WEST OF RWY 03 / 21.
- COLOUR: SEE
SPEC NOTICES.

Changes: CAT C CIRCLING MINIMA.

MERGN02-185

NDB-A

MERIMBULA, NSW (YMER)[illegible]

CATEGORY	A	B	C	D
				NOT APPLICABLE
CIRCLING *	1140 (1132-2.4)		1290(1282-4.0)	
ALTERNATE	(1632-4.4)		(1782-6.0)	

1. MAX IAS:
INITIAL : 210KT.
- * 2. NO CIRCLING
WEST OF RWY
03 / 21.
3. **COLOUR:** SEE
SPEC NOTICES.

MERNB01-185